

TWO-SPOKE CONTROL HANDWHEEL WITH REVOLVING FOLDING HANDLE AND LOCKING PISTON

MATERIAL:

Reinforced and stabilised polyamide.
Oils and greases resistant.

SURFACE:

Satin.

COMPLETE HANDWHEEL COLOUR:

Black (RAL 9011).

CENTRAL CAP:

Grey polyamide (RAL 7035 code 13).

ALTERNATIVE CAP COLOUR:

Orange (RAL 2004 code 02).


Blue (RAL 5015 code 07).

Yellow (RAL 1021 code 10).

Red (RAL 3000 code 16).

Green (RAL 6024 code 17).

Black (RAL 9011 code 01).

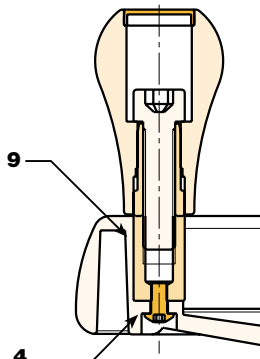

LOCKING PISTON KIT:

(1) PA6+GF hole cover ring. Black (RAL 9011). Push-fit assembly. Removable.

(2) PA6+GF piston holder. Black (RAL 9011). Assembly by means of two self-tapping, galvanised steel screws, screwdriver head 3.5x30.

(3) PA6+GF gear stick d. 26 with M4 brass female threaded insert and positioning brackets. Black (RAL 9011).

(5) PA6+GF gear stick support with positioner. Black (RAL 9011).

(6) Galvanised steel return spring.

(7) Galvanised steel washer.

(8) Galvanised steel locking piston. Seat for Allen wrench no. 5 for fastening. Piston stroke 10 mm. Useful projection from handwheel 8 mm.

INSERTS:

(1) Customised galvanised steel through-hole insert.

(4) Black-oxide treated hexagon socket button head screw ISO 7838 for fastening handle.

(9) (art. D602) Black-oxide treated steel insert with hexagonal threaded through-hole.

SIDE HANDLE:

(art. D601) Flush, foldaway revolving handle, with hexagonal connection. Made from reinforced polyamide (shape same as art. M202). Black-oxide treated internal mechanism. Fixing by means of black-oxide treated hexagon socket button head screw ISO 7838. Grey polyamide push fit cap (RAL 7035 code 13).

(art. D602) Revolving handle Art. M202 (see Chapter M on page 18).

For fixing systems, or execution of tabs or square holes, please refer to the technical notes attached to the catalogue.

SPECIAL REQUESTS:

- It is possible to supply the inserts in different materials, on request and for quantities.
- It is possible to supply the inserts with different treatment-finishes, on request and for quantities.



Locking piston kit



ART. D602

Art.	D	H	Ht	h	d	M	C	h2	h3	d2	d3	Q	dm	dl	L	Weight (gr)
D602-350	346	80	86	49,5	67,5	24	56	43,5	17,5	49	35	32	30	40	64	1800

Art.	l	dv	hv	h1	dp	hp	DA	HA	DB	F
D602-350	55	26	21	8	10	10	131	20	76	38

d1 = On request.

It's possible to increase the hole, by boring, until dm.



BOTECA