

G632

4 LOBE HANDWHEEL WITH INDEXED INSERT (PUSH TO USE) AND MALE THREAD



Materials:

(3-4) Special high resistance glass fiber reinforced technopolymer.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

(3-4) Black. (RAL 9011).

Central fixing button:

(1) Red polyamide button (RAL 3000 code 16).

Alternative handwheel and button colour:

Orange (RAL 2004 cod. 02).
Blue (RAL 5015 cod. 07).
Yellow (RAL 1021 cod. 10).
Red (RAL 3000 cod. 16).
Green (RAL 6024 cod. 17).
Grey (RAL 7035 cod. 13).
Black (RAL 9001 code 01).

Inserts:


Galvanised steel threaded stud (thread tolerance 6g).

Spring:

Stainless steel spring (Aisi 302).

Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities inserts can be supplied in different materials.
- Upon request and for special quantities available in the colours indicated in the chart [page 805].

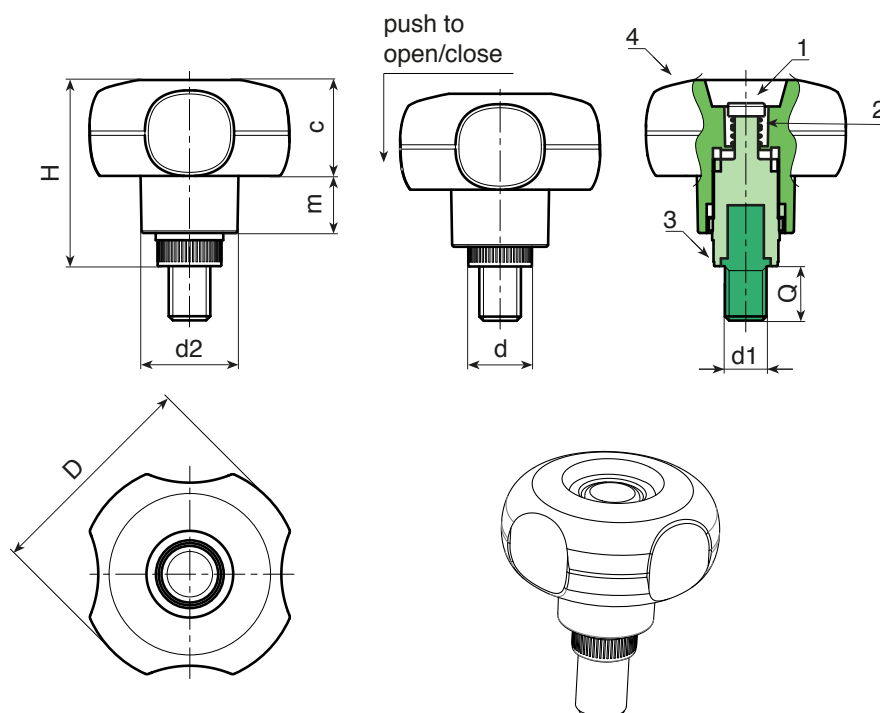

	art.	D	H	d2	d	m	c	LM	d1 _{6g}	Q	g
●	G63250.TM06X..0116	49	42.5	22	15	13	22	90	M6	A.R.	-
●	G63250.TM08X..0116	49	42.5	22	15	13	22	90	M8	A.R.	-
●	G63250.TM10X..0116	49	42.5	22	15	13	22	90	M10	A.R.	-

LM = Maximum mouldable length.

A.R. = Upon request, for a minimum of 250 pieces.

Enter the selected stud length in place of the two dots .. in the item code.

