

WINGNUT WITH THREADED STUD

L751



Material:

Reinforced polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:




Black (RAL 9011).

Main Insert:

Zinc plated steel threaded stud (tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply inserts in different materials, on request and for quantities.
- It is possible to supply colours as shown in the table on page L-27, on request and for quantities.

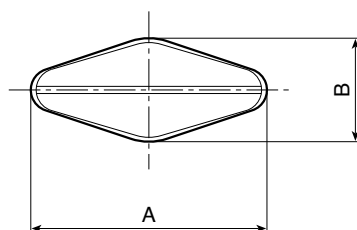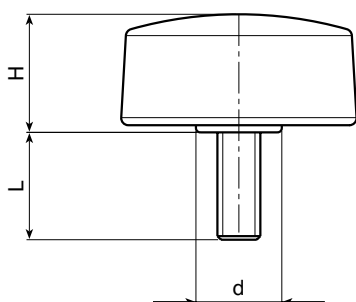

Art.	A	B	H	m	d	LM	d1 6g	Q	g
L75132.TM05X..01	33	15	16,5	1	12	60	M05	16-25-30-40	8-9-11-15
L75132.TM06X..01	33	15	16,5	1	12	60	M06	10-16-20-25-30-40	9-11-12-12-12,5-15,5
L75132.TM08X..01	33	15	16,5	1	12	60	M08	16-20-25-30-40	4,5-16-17,5-19-22
L75148.TM06X..01	48	15	16	1	12,5	70	M06	10-16-20-40	13-15-16-17-22
L75148.TM08X..01	48	15	16	1	12,5	70	M08	16-20-25-30-40	18-20-21,5-23-27

Enter the stud length choice in the two .. of the article code. Lengths by request with 250 pieces minimum quantity.

LM = Maximum mouldable length.

Presumable presence in the stock in %

(☺) 90% (☹) 40% (☹) 5% (☹)

BOTECO® - © All right reserved - www.boteco.it
Any unauthorized reproduction is strictly forbidden



BOTECO