

N776



PA6
+GF

UL94
HB



4 LOBE CONTROL KNOB WITH THREADED STUD

Material:

Reinforced and polyamide.
Oils and greases resistant.

Surface:

Satin.

Colour:


Black (RAL 9011).

Main Insert:

Zinc plated steel threaded stud (tolerance 6g).

SPECIAL REQUESTS:

- It is possible to supply inserts in different lengths or by special design, on request and for quantities.
- It is possible to supply inserts in different materials, on request and for quantities.

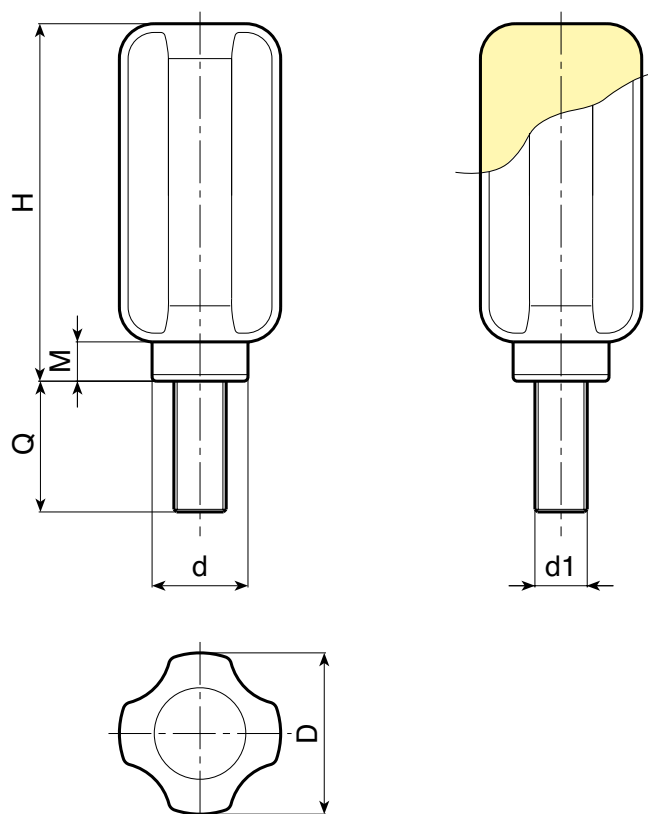

	Art.	D	H	M	d	LM	d1 6g	Q	g
☺	N77638.TM08X2001	37	81	9	22	130	M08	20	120
☺	N77638.TM10X2001	37	81	9	22	130	M10	20	126
	N77638.TM12X..01	37	81	9	22	130	M12	30-40-50	135-143-150

Enter the stud length choice in the two .. of the article code. Lengths by request with 200 pieces minimum quantity.

LM = Maximum mouldable length.

N
CONTROL KNOBS

ver. NUK.10-1212



BOTECA

N - 10

Presumable presence in the stock in %

(☺) 90% (☺) 40% (☹) 5% (☹)

www.boteco.it - © All right reserved - BOTECA®
Any unauthorized reproduction is strictly forbidden