

# W270

## T-HANDLE WITH STEEL INDEXING PLUNGER



### Materials:

(4) Reinforced polyamide T-handle. Cannot be disassembled.  
Resistant to oils and greases.

### W270:

(3) Galvanised steel spring.  
(2) Threaded high-resistance steel hexagon ring nut.  
(1) Hardened high resistance steel plunger pin.

### W270CIN:

(3) Stainless steel spring (Aisi 301).  
(2) Threaded stainless steel hexagon ring nut (Aisi 303).  
(1) Stainless steel plunger pin (Aisi 303).

### Surface finish:

(4) Satin.  
(1-2-3-5) Smooth.

### Colour:

(4) Black (RAL 9011).

### W270:

(1-2-5) Black-oxide treated.

### W270CIN:


(1-2-5) Natural.

### ATTENTION:

> We recommend an H7 tolerance for the plunger stem bore.

### Special Requests:

- On request and for special quantities the T-handle can be supplied in the colours indicated in the table [page 805].

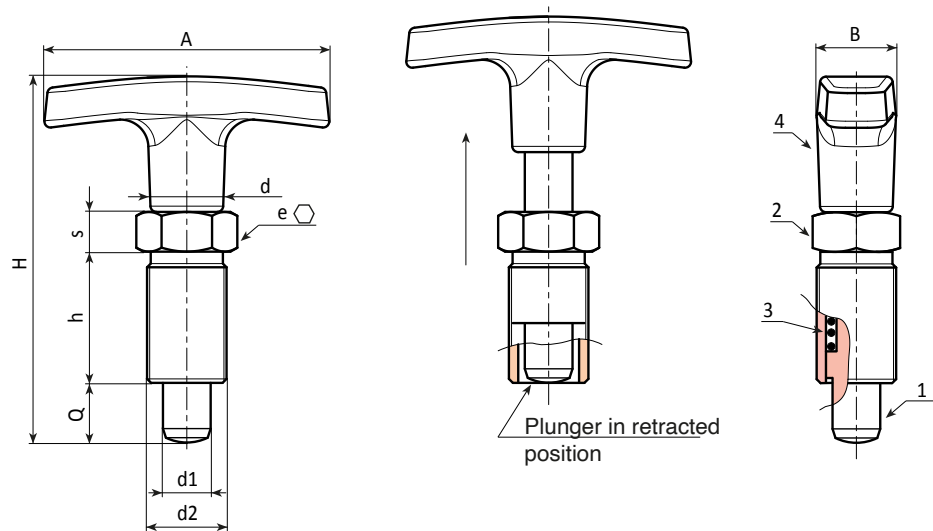

### Version W270 - black-oxide treated steel

Art.	A	B	H	h	h1	d2	d	e	s	d1 -0,02 -0,04	Q	g
W270.Q0501	50	15	51	17	15	M10x1	14	12	5	5	5	29
W270.Q0601	50	15	56	20	18	M12x1,5	14	14	6	6	6	36
W270.Q0801	60	18	75	26	24	M16x1,5	17	19	8	8	8	73
W270.Q1001	72	20	92	33	31	M20x1,5	18	22	10	10	10	136

### Version W270CIN - stainless steel (Aisi 303)

INOX

Art.	A	B	H	h	h1	d2	d	e	s	d1 -0,02 -0,04	Q	g
W270.I0501CIN	50	15	51	17	15	M10x1	14	12	5	5	5	29
W270.I0601CIN	50	15	56	20	18	M12x1,5	14	14	6	6	6	36
W270.I0801CIN	60	18	75	26	24	M16x1,5	17	19	8	8	8	73
W270.I1001CIN	72	20	92	33	31	M20x1,5	18	22	10	10	10	136



# W271



## T-HANDLES WITH STEEL INDEXING PLUNGER AND LOCK NUT

### Materials:

(4) Reinforced polyamide T-handle. Cannot be disassembled. Resistant to oils and greases.

### W271:

- (3) Galvanised steel spring.
- (2) Threaded high-resistance steel hexagon ring nut.
- (1) Hardened high resistance steel plunger pin.
- (5) Threaded steel lock nut (UNI 5589).

### W271CIN:

- (3) Stainless steel spring (Aisi 301).
- (2) Threaded stainless steel hexagon ring nut (Aisi 303).
- (1) Stainless steel plunger pin (Aisi 303).
- (5) Threaded stainless steel lock nut (Aisi 304) (UNI 5589).

### Surface finish:

- (4) Satin.
- (1-2-3-5) Smooth.

### Colour:

- (4) Black (RAL 9011).

### W271:

- (1-2-5) Black-oxide treated.

### W271CIN:



- (1-2-5) Natural.

### ATTENTION:

- > We recommend an H7 tolerance for the plunger stem bore.
- > The nut is supplied assembled.

### Special Requests:

- On request and for special quantities the T-handle can be supplied in the colours indicated in the table [page 805].
- On request the nut can be supplied disassembled.

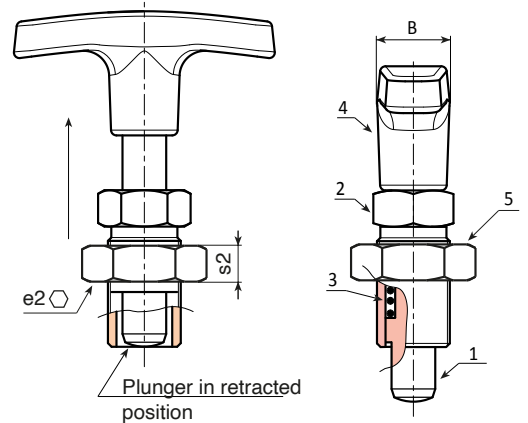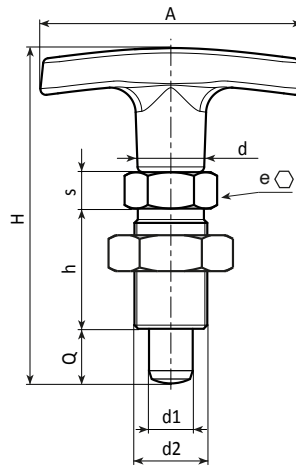

### Version W271 - black-oxide treated steel

Art.	A	B	H	h	h1	d2	d	e	s	e2	s2	d1 -0,02 -0,04	Q	g
W271.Q0501	50	15	51	17	15	M10x1	14	12	5	17	5	5	5	34
W271.Q0601	50	15	56	20	18	M12x1,5	14	14	6	19	6	6	6	45
W271.Q0801	60	18	75	26	24	M16x1,5	17	19	8	24	8	8	8	90
W271.Q1001	72	20	92	33	31	M20x1,5	18	22	10	30	9	10	10	161

### Version W271 CIN - stainless steel (Aisi 303)

Art.	A	B	H	h	h1	d2	d	e	s	e2	s2	d1 -0,02 -0,04	Q	g
W271.I0501CIN	50	15	51	17	15	M10x1	14	12	5	17	5	5	5	34
W271.I0601CIN	50	15	56	20	18	M12x1,5	14	14	6	19	6	6	6	45
W271.I0801CIN	60	18	75	26	24	M16x1,5	17	19	8	24	8	8	8	90
W271.I1001CIN	72	20	92	33	31	M20x1,5	18	22	10	30	9	10	10	161

INOX

