

W797

W797CIN - W798 W798CIN

RING INDEXING PLUNGER WITH OR WITHOUT LOCK NUT



INOX

W797 Version: Galvanised steel indexing plunger with ring

	Art.	D	H	h	s	A	e	d2	d1 ^{-0,02 -0,04}	Q	g
☹	W797.J04	15	35,5	12	4,5	2	6	M06	4	4	5
😊	W797.J05	19	46	16	6	2,5	8	M08	5	5	11
☹	W797.J06	27	60,5	20	7,5	3	10	M10	6	6	23
😊	W797.J08	33	74	24	9	3,5	12	M12	8	8	38

W798 Version: Galvanised steel indexing plunger with ring and lock nut

	Art.	D	H	h	s	A	e	e2	s2	d2	d1 ^{-0,02 -0,04}	Q	g
☹	W798.J04	15	35,5	12	4,5	2	6	10	4	M06	4	4	7
😊	W798.J05	19	46	16	6	2,5	8	13	5	M08	5	5	16
☹	W798.J06	27	60,5	20	7,5	3	10	17	6	M10	6	6	31
😊	W798.J08	33	74	24	9	3,5	12	19	7	M12	8	8	50

W797 CIN Version: Stainless steel indexing plunger with ring

	Art.	D	H	h	s	A	e	d2	d1 ^{-0,02 -0,04}	Q	g
😊	W797.J04CIN	15	35,5	12	4,5	2	6	M06	4	4	5
☹	W797.J05CIN	19	46	16	6	2,5	8	M08	5	5	11
☹	W797.J06CIN	27	60,5	20	7,5	3	10	M10	6	6	23
☹	W797.J08CIN	33	74	24	9	3,5	12	M12	8	8	38

W798CIN Version: Stainless steel indexing plunger with ring and lock nut

	Art.	D	H	h	s	A	e	e2	s2	d2	d1 ^{-0,02 -0,04}	Q	g
😊	W798.J04CIN	15	35,5	12	4,5	2	6	10	4	M06	4	4	7
☹	W798.J05CIN	19	46	16	6	2,5	8	13	5	M08	5	5	16
☹	W798.J06CIN	27	60,5	20	7,5	3	10	17	6	M10	6	6	31
☹	W798.J08CIN	33	74	24	9	3,5	12	19	7	M12	8	8	50

W - S PLUNGERS

ver. W-SUK.01-0613

BOTECO METAL LINE

W-S - 16

Presumable presence in the stock in %

(☹) 90% (😊) 40% (☹) 5% (☹)

www.boteco.it - © All right reserved - BOTECO®

Any unauthorized reproduction is strictly forbidden

Versions:

- W797** Galvanised steel indexing plunger with ring.
- W798** Galvanised steel indexing plunger with ring and lock nut.
- W797 CIN** Stainless steel indexing plunger with ring.
- W798 CIN** Stainless steel indexing plunger with ring and lock nut.

Material:

Versions W797 e W798

- (1) Stainless steel plunger pin (AISI 303).
- (2) Galvanised automatic steel indexing plunger body.
- (3) Galvanised steel spring.
- (4) Harmonic stainless steel circlip.
- (5) Threaded galvanised steel lock nut (UNI 5589).

Versions W797 CIN and W798 CIN


- (1) Stainless steel plunger pin (AISI 303).
- (2) Stainless steel indexing plunger body (AISI 303).
- (3) Stainless steel spring (AISI 303).
- (4) Harmonic stainless steel circlip.
- (5) Stainless steel lock nut (AISI 304) (UNI 5589).

ATTENTION: The manufacturer recommends making the lodging hole for the plunger pin with tolerance H7.

Packs containing 10 pieces.

SPECIAL REQUESTS:

- None.

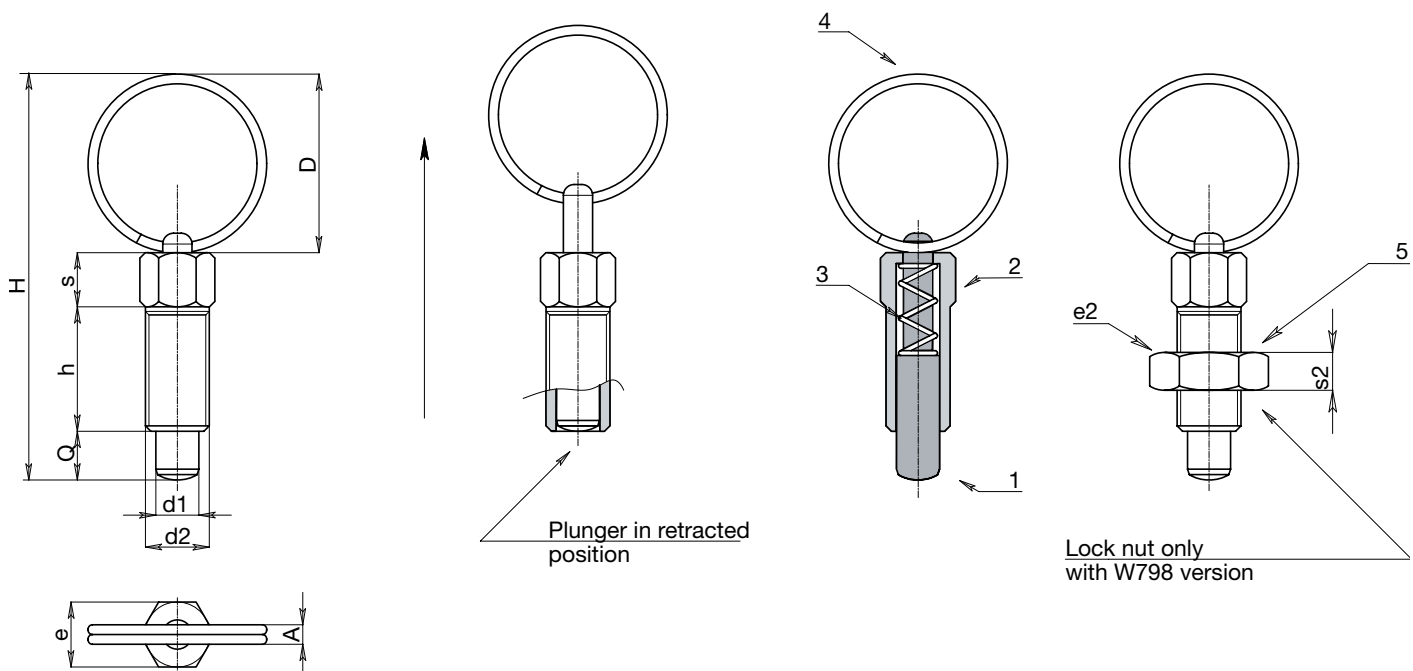

Presumable presence in the stock in %

(☒) 90% (☑) 40% (☐) 5% (⊖)

BOTECO® - © All right reserved - www.boteco.it

Any unauthorized reproduction is strictly forbidden