



6-211SL Locking Pin SNAP-LINE

RoHS
WEEE

Benefits:

- ▶ Locking pin with spring-loaded handle.
- ▶ Tool-less assembly.
- ▶ Allows locking of covers and flaps in defined positions.
- ▶ Can be used as locking device for drawers.
- ▶ Large handle.
- ▶ Also usable as hinge.
- ▶ Flexible use for material thicknesses from 1 to 13 mm.



Material:

- ▶ **Pin:** steel, zinc plated
- ▶ **Handle:** PA, green
- ▶ **Spacer:** PA, black





Locking pin with handle

Part Number	Ø D1	1. Clamping range (S) with 8mm spacer	2. Clamping range (S) with 4mm spacer	3. Clamping range (S) without spacer	H depending on clamping range (S)	Cutout housing	Cutout pin
245-9306.00-00000	8mm	1 - 5mm	5 - 9mm	9 - 13mm	9.6 - 5.6mm	Ø 9.5 + 0.1mm	Ø 8.1 + 0.1mm
245-9305.00-00000	6mm	1 - 5mm	5 - 9mm	9 - 13mm	9.6 - 5.6mm	Ø 9.5 + 0.1mm	Ø 6.1 + 0.1mm

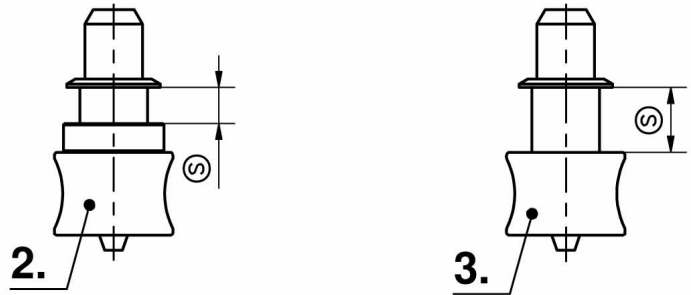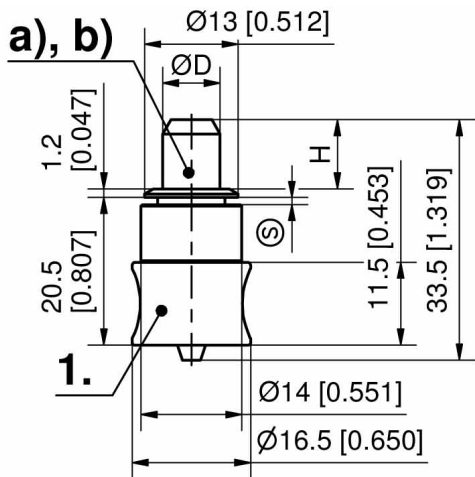

Operation sequence

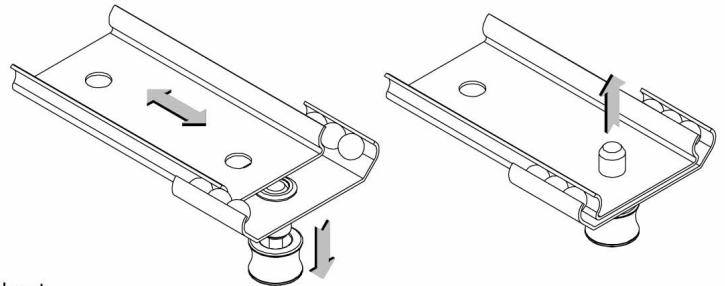

To install, the locking pin 4. is simply pushed into the cutout without the use of tools or hardware. The spacer 5. (if needed) and the handle 6. will be put over the housing and snap into the groove of the pin captively.

To lock, the spring-loaded handle is released.
To loosen, the spring-loaded handle is pulled out.