

2-126.04 Dual Cylinder Swinghandle RS 130 PA



Dual cylinder swinghandle with pivotable operating lever. Fully insulated for installation in plastic cabinets

Advantages

- Two profile-cylinders with lengths of 40 and / or 45 mm, allow opening by each cylinder without un locking the other one.
- Latch bolt securely locked against unauthorized opening.
- IP65 according to DIN EN 60529.
- a) Latch bolt with chamfer. Closing is possible if key is removed.
- b) Latch bolt with detent. Detent requires turning the key.
- Upgrading with steel insert (saw protection) possible.
- To use the same door both RH and LH, 2 holes $\varnothing 46$, symmetrical to door center are possible.
- (S) = max. 3 mm.

Materials

- a) and b)
- **Swinghandle and dish:** PA, black

Remarks

(S) = max. 3 mm.



Dual cylinder swinghandle

	Part Number	Latching type	Internal cover	Material cylinder cover	Sealable	Version
a)	207-9417.00-00000	PHZ 40/45mm	$\varnothing 46$	PA, reinforced	Yes	Latch bolt without detent
b)	207-9418.00-00000	PHZ 40/45mm	$\varnothing 46$	PA, reinforced	Yes	Latch bolt with detent




* Complementary products




- e) 2-140 **Profile-Cylinder**
- f) 1-181.01 **Adapter for round rods**

- f) 1-181SL **Adapter PA for Round Rods SNAP-LINE**
- d) 1-170 **Round Rods**
- d) 1-180 **Round Rods**
- c) 2-150 **3-Point Cam**
- g) 200-3623.51-00000 **Rod guide**
204-0301.00-00000 **PZ building key**
- c1) 207-9599.00-00000 **3- or 4-point Cam**

Function extension

- h) 207-2702.03-00000 **Adapter for cutout 46mm square**
- h1) 207-2803.00-00000 **Gasket for adapter 46mm square**

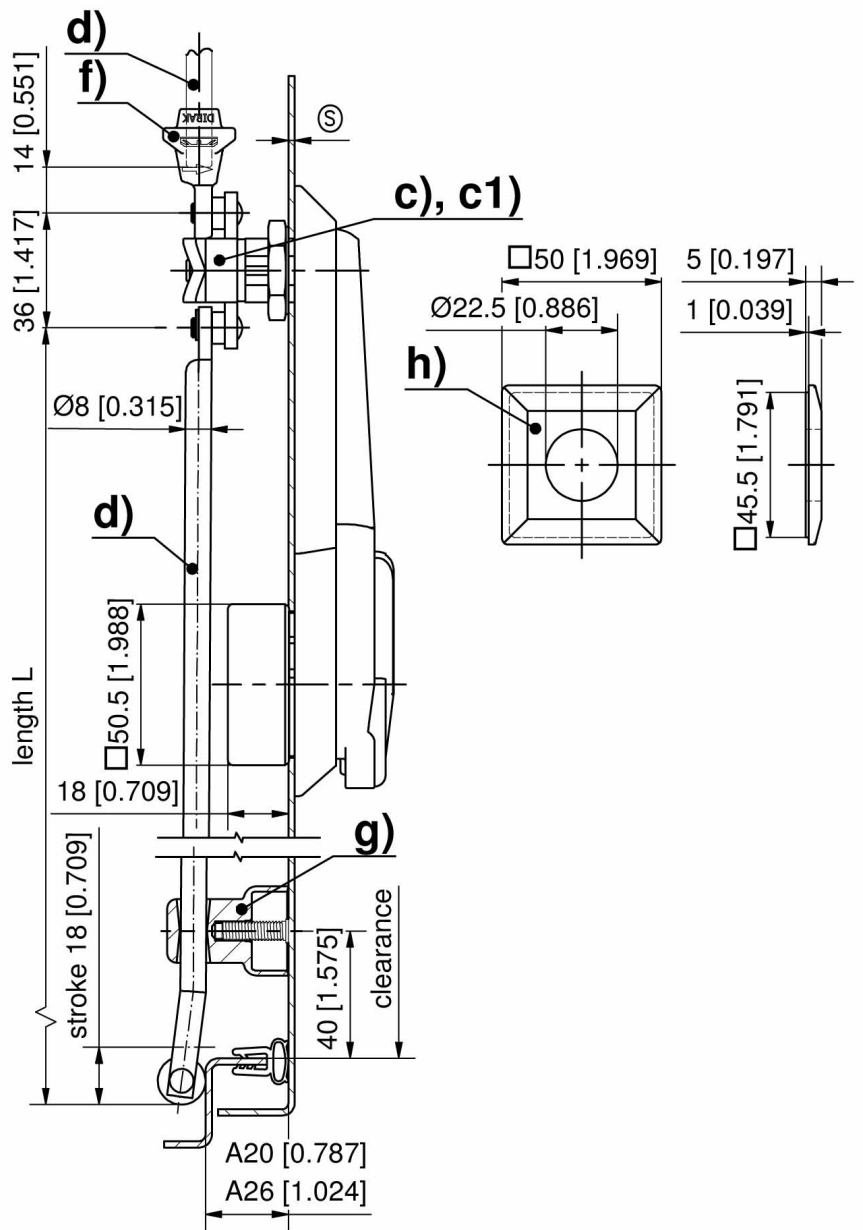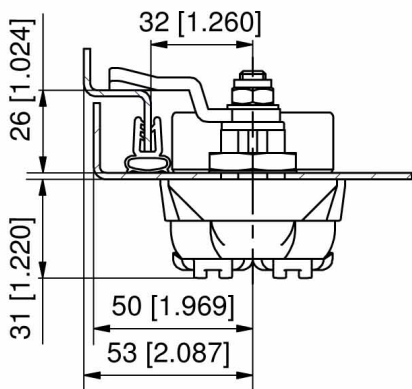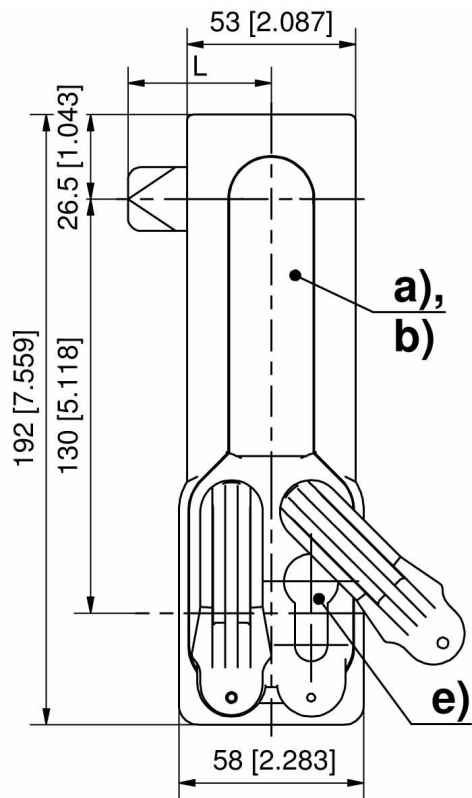

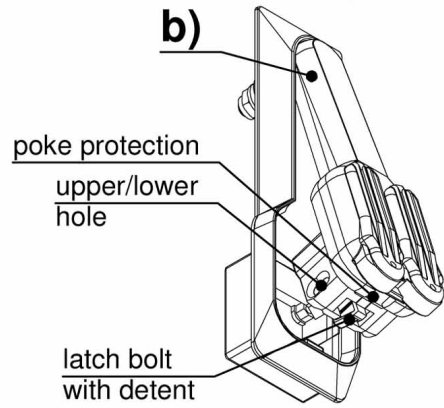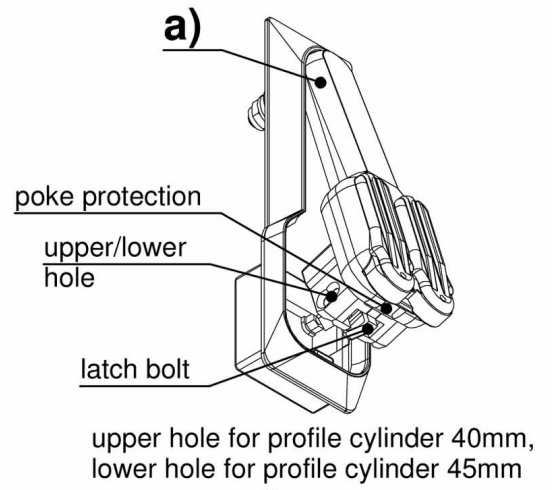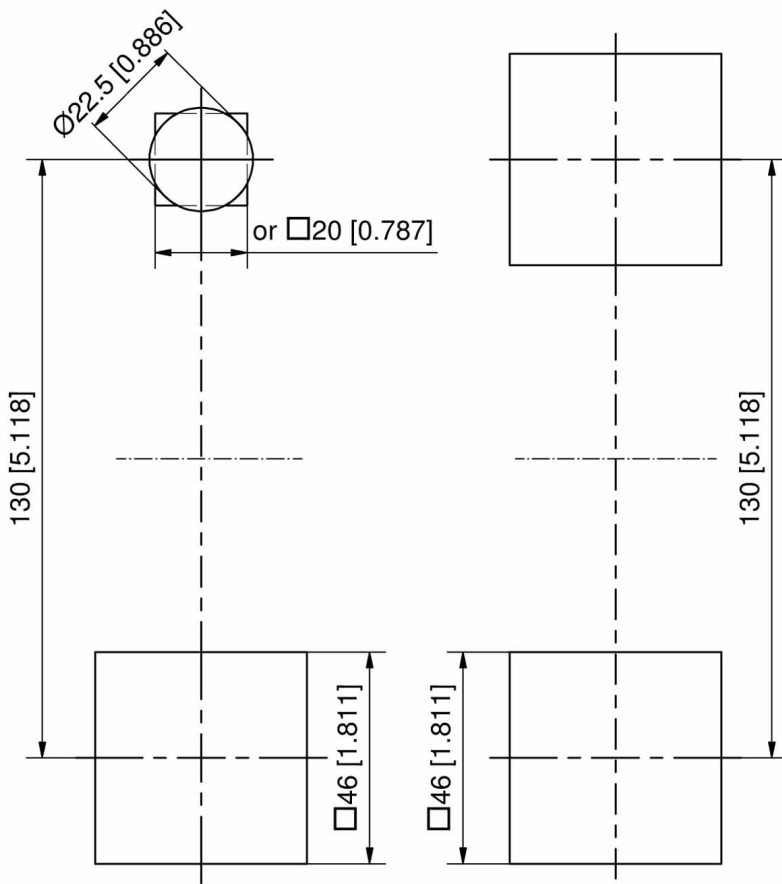

Formula for rods with eye and rollers:
cutout in the door center (rod length varies)

$$L = \frac{\text{upper rod clearance} - 12\text{mm}[0.472]}{2 [0.079]} - 65 \text{ mm} [2.559]$$

$$L = \frac{\text{lower rod clearance} - 12\text{mm}[0.472]}{2 [0.079]} + 65 \text{ mm} [2.559]$$

cutout outside the door center (rod length equal)

$$L = \frac{\text{clearance} - 12\text{mm}[0.472]}{2[0.079]}$$