




# Square flanged bearing supports

Serie **UCF/C**

Serie **MUCF/C**



Full protection of bearing

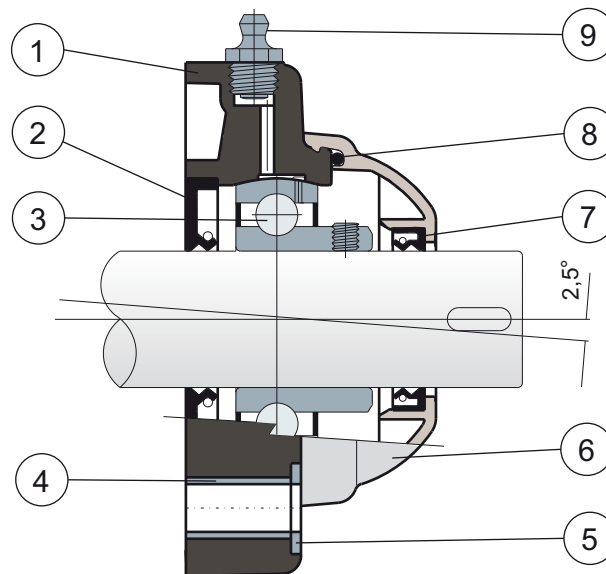

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.



# Square flanged bearing supports

## Technical data

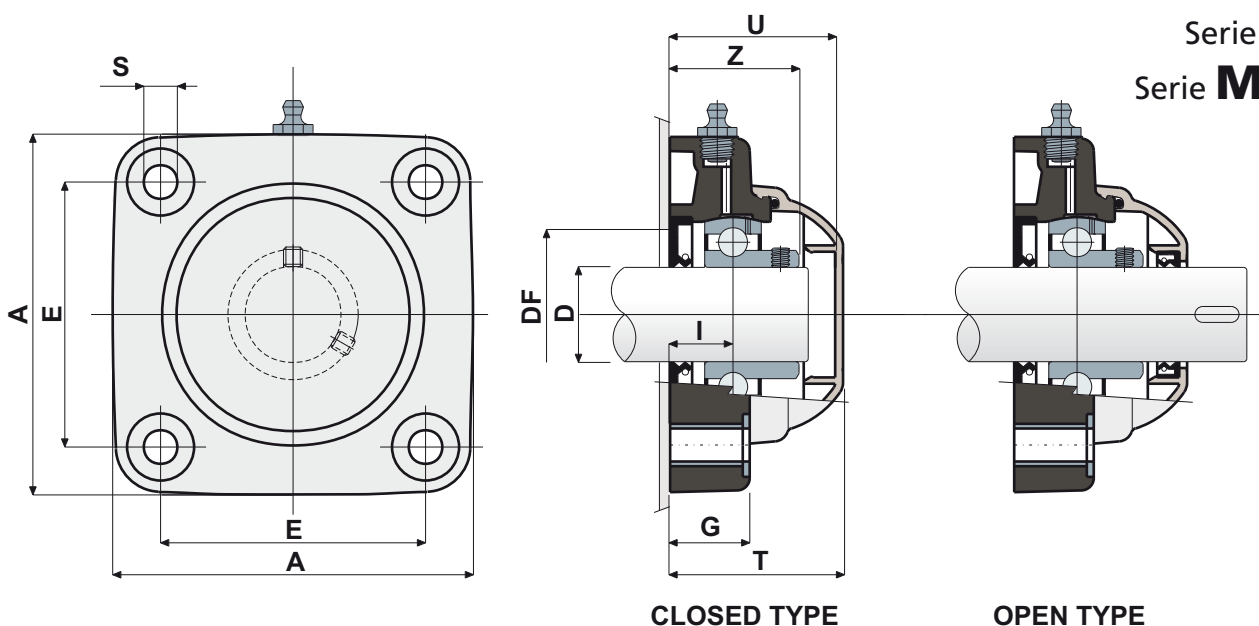

Series **UCF/C**  
Series **MUCF/C**

CHROME STEEL BEARING																
D	SERIES	CODES		DIMENSIONS (mm)								DF		Bearing load (N)		Bearing support load
		Closed type	Open type	E	A	S	G	I	Z	U	T	Max	Min	C	C0	(N)
20	UCF 204 C	80248	80249	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500
25	UCF 205 C	80057	80060	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000
30	UCF 206 C	80009	80005	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500
30	MUCF 206 C	84038	84039	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500
35	UCF 207 C	80058	80061	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000
35	MUCF 207 C	82549	82392	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000
40	UCF 208 C	80250	80251	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000
40	MUCF 208 C	80697	80699	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440C																
D	SERIES	CODES		DIMENSIONS (mm)								DF		Bearing load (N)		Bearing support load
		Closed type	Open type	E	A	S	G	I	Z	U	T	Max	Min	C	C0	(N)
20	UCF 204 C	80400	80448	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	16500
25	UCF 205 C	80445	80449	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000
30	UCF 206 C	80378	80377	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500
30	MUCF 206 C	84040	84041	83	113	10,5	26	20	41	65	68	60	50	12500	11200	17500
35	UCF 207 C	80446	80450	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000
35	MUCF 207 C	83467	83466	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000
40	UCF 208 C	80447	80451	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000
40	MUCF 208 C	81057	81058	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000

**MATERIALS:** Support made of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made of nickel plated brass; reinforcement bushings and washers made of stainless steel AISI 304; gaskets made of NBR rubber; cover made of polypropylene, grey colour RAL 7042.

**FEATURES:** Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




## Square flanged bearing supports

Serie **UCF/CX**

Serie **MUCF/CX**



Without protection cover

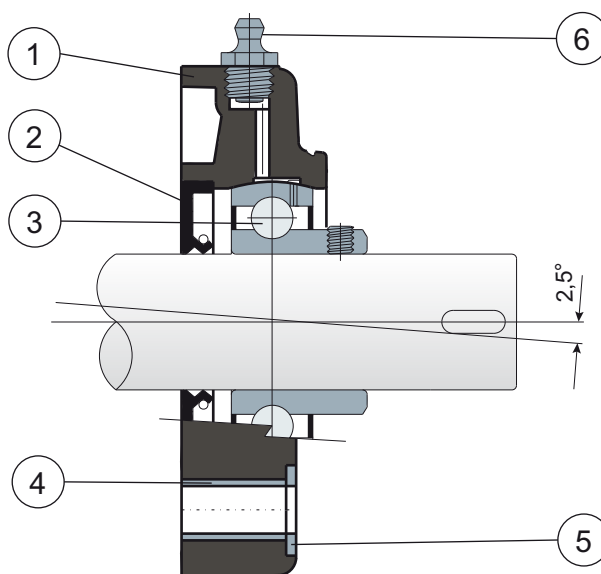

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCF/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.




# Square flanged bearing supports




## Technical data

Series **UCF/CX**

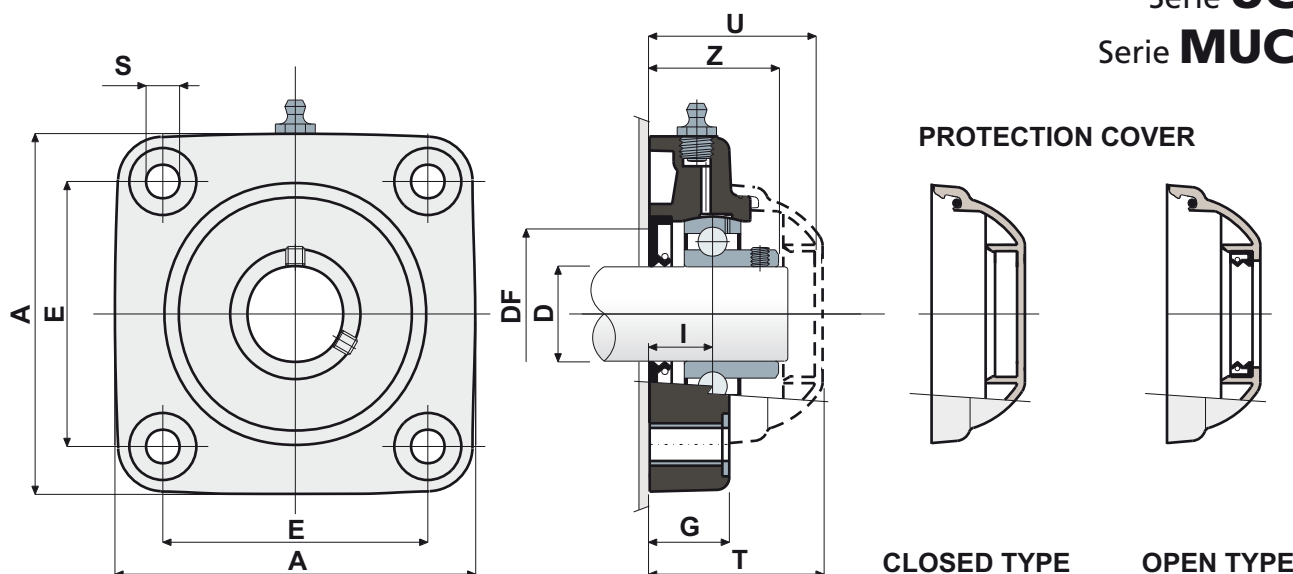Series **MUCF/CX**



CHROME STEEL BEARING																	
D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
											Max	Min					
20	UCF 204 CX	80252	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	80254	80255
25	UCF 205 CX	80175	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	80075	80076
30	UCF 206 CX	80176	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	80011	80053
30	MUCF 206 CX	80789	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	80256	80494
35	UCF 207 CX	80177	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	80077	80078
35	MUCF 207 CX	83462	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000	80256	80495
40	UCF 208 CX	80253	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	80256	80257
40	MUCF 208 CX	80701	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	80256	80257

STAINLESS STEEL BEARING AISI 440C																	
D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
											Max	Min					
20	UCF 204 CX	81047	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	16500	80254	80255
25	UCF 205 CX	81049	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000	80075	80076
30	UCF 206 CX	81050	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500	80011	80053
30	MUCF 206 CX 	84042	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	80256	80494
35	UCF 207 CX	81051	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000	80077	80078
35	MUCF 207 CX 	82404	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	80256	80495
40	UCF 208 CX	80561	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	80256	80257
40	MUCF 208 CX 	81043	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	80256	80257

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCF/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




## Square flanged bearing supports

Serie **UCF**  
Serie **MUCF**



Without cover and back gasket

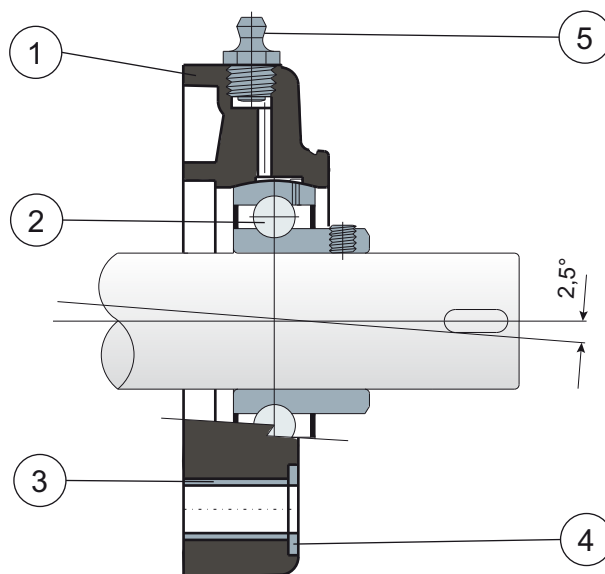

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCF/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.






# Square flanged bearing supports

Technical data

Serie **UCF**  
Serie **MUCF**

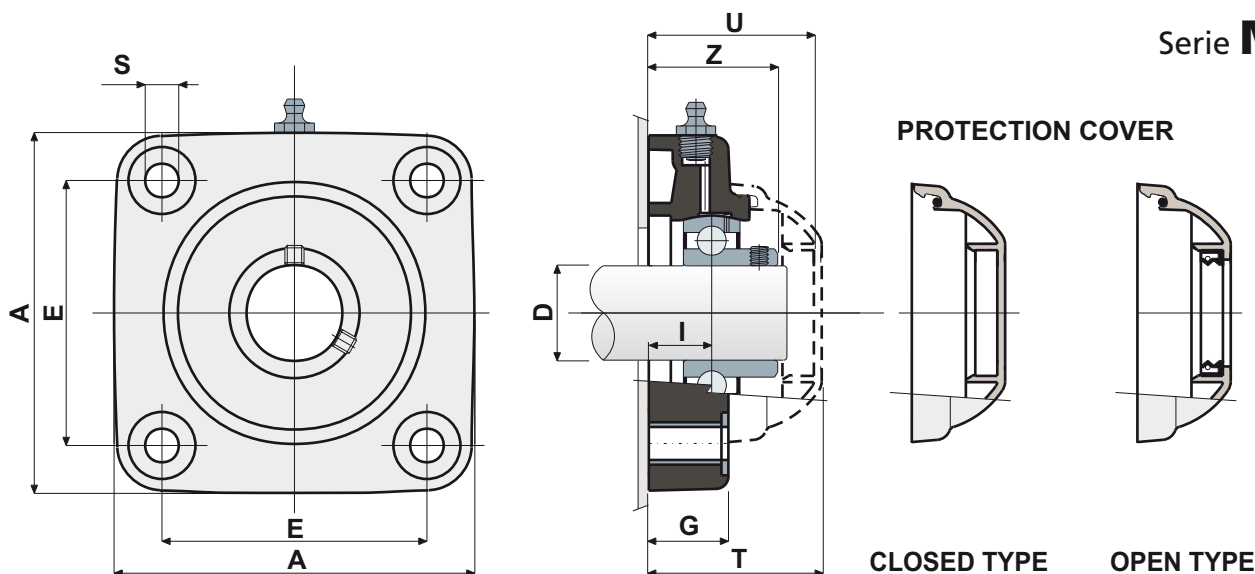

CHROME STEEL BEARING																
D	SERIES	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Bearing support load	COVER CODES		
			E	A	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type	
20	UCF 204	80258	63,5	90	10,5	19	15,5	33,5	44	46,5	12800	6600	16500		80254	80255
25	UCF 205	80054	70	99	10,5	22	17	36	47	49	14000	7800	17000		80075	80076
30	UCF 206	80010	83	113	10,5	26	20	41	54	56	19500	11300	17500		80011	80053
30	MUCF 206	 84043	83	113	10,5	26	20	41	65	68	19500	11300	17500		80256	80494
35	UCF 207	80055	92	122	10,5	26	20	45	57	59	25500	15300	18000		80077	80078
35	MUCF 207	 82652	83	113	10,5	26	19,5	45	65	68	25500	15300	18000		80256	80495
40	UCF 208	80259	102	133	10,5	26	19,5	48,5	65	68	32500	19800	18000		80256	80257
40	MUCF 208	 80712	83	113	10,5	26	19,5	48,5	65	68	32500	19800	18000		80256	80257

STAINLESS STEEL BEARING AISI 440C															
D	SERIES	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Bearing support load	COVER CODES	
			E	A	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type
20	UCF 204	80514	63,5	90	10,5	19	15,5	33,5	44	46,5	8300	6550	16500	80254	80255
25	UCF 205	80515	70	99	10,5	22	17	36	47	49	9150	7800	17000	80075	80076
30	UCF 206	80976	83	113	10,5	26	20	41	54	56	12500	11200	17500	80011	80053
30	MUCF 206	84044	83	113	10,5	26	20	41	65	68	12500	11200	17500	80256	80494
35	UCF 207	81052	92	122	10,5	26	20	45	57	59	16600	15300	18000	80077	80078
35	MUCF 207	83468	83	113	10,5	26	19,5	45	65	68	16600	15300	18000	80256	80495
40	UCF 208	80695	102	133	10,5	26	19,5	48,5	65	68	20000	19000	18000	80256	80257
40	MUCF 208	81045	83	113	10,5	26	19,5	48,5	65	68	20000	19000	18000	80256	80257

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCF/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




## Square flanged bearing supports

Serie **UCF/CS**

Serie **MUCF/CS**



Back gasket for shouldered shaft

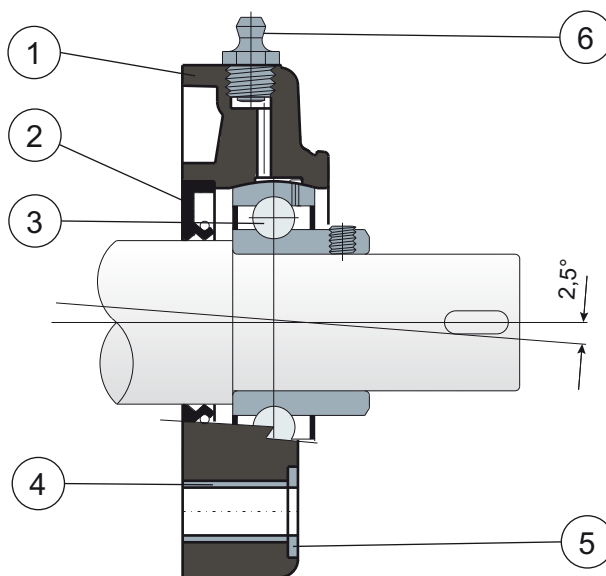

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.






# Square flanged bearing supports

Technical data

Series **UCF/CS**  
Series **MUCF/CS**

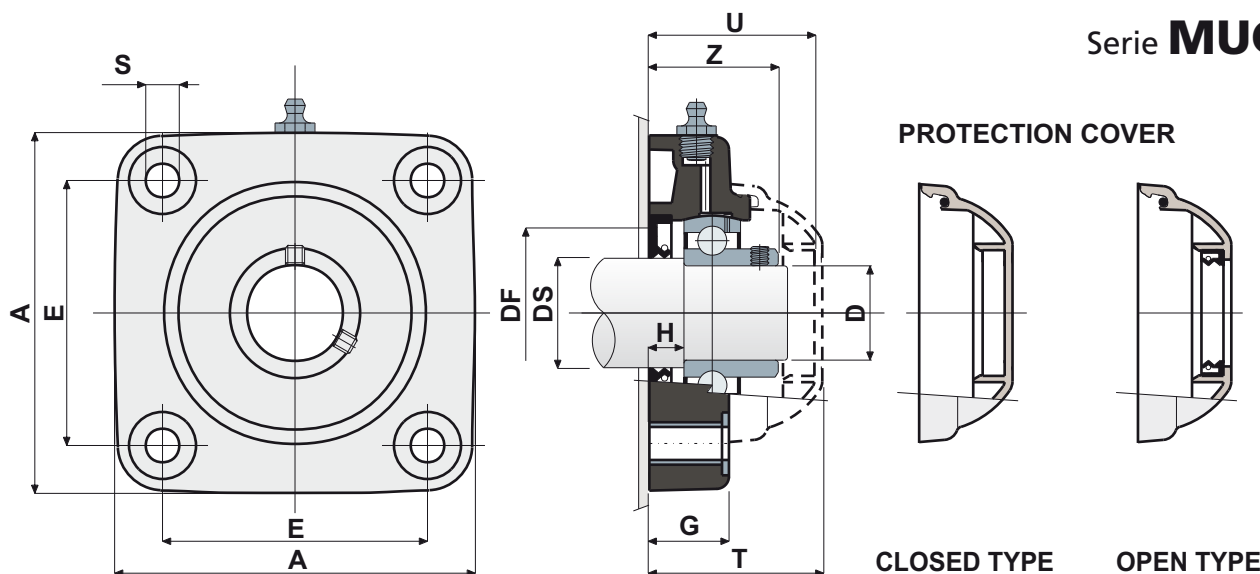

CHROME STEEL BEARING																			
DS	D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES		
				E	A	S	G	H	Z	U	T	DF		C	C0	(N)	Closed type	Open type	
												Max	Min						
25	20	UCF 204 CS	80260	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500	80254	80255	
30	25	UCF 205 CS	80178	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000	80075	80076	
35	30	UCF 206 CS	80179	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500	80011	80053	
35	30	MUCF 206 CS	84045	83	113	10,5	26	11,5	41	65	68	60	50	19500	11300	17500	80256	80494	
40	35	UCF 207 CS	80180	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000	80077	80078	
40	35	MUCF 207 CS	84046	92	122	10,5	26	10,5	45	65	68	70	55	25500	15300	18000	80256	80257	
45	40	UCF 208 CS	80261	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	80256	80257	
45	40	MUCF 208 CS	80713	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	80256	80257	

STAINLESS STEEL BEARING AISI 440C																		
DS	D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)	COVER CODES	
				E	A	S	G	H	Z	U	T	DF		C	C0		Closed type	Open type
												Max	Min					
25	20	UCF 204 CS	83520	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500	80254	80255
30	25	UCF 205 CS	84146	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000	80075	80076
35	30	UCF 206 CS	83829	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500	80011	80053
40	35	UCF 207 CS	84147	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000	80077	80078
45	40	UCF 208 CS	80322	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	80256	80257
45	40	MUCF 208 CS	83828	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	80256	80257

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** Back gasket for shouldered shafts. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.






## Square flanged bearing supports

Series **UCF/CA**



External cover made out of stainless steel AISI 304

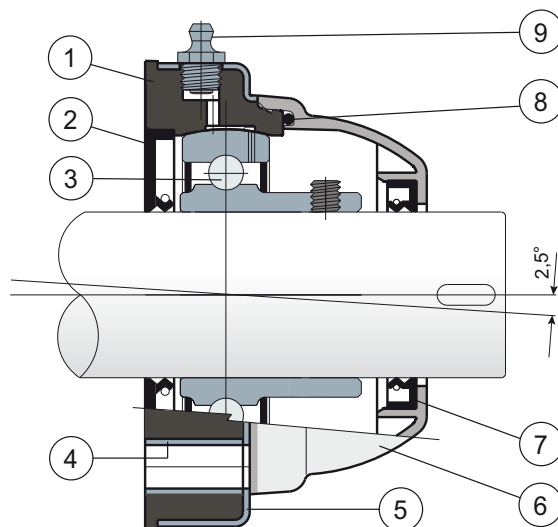

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Square flanged bearing supports

Technical data

Serie **UCF/CA**

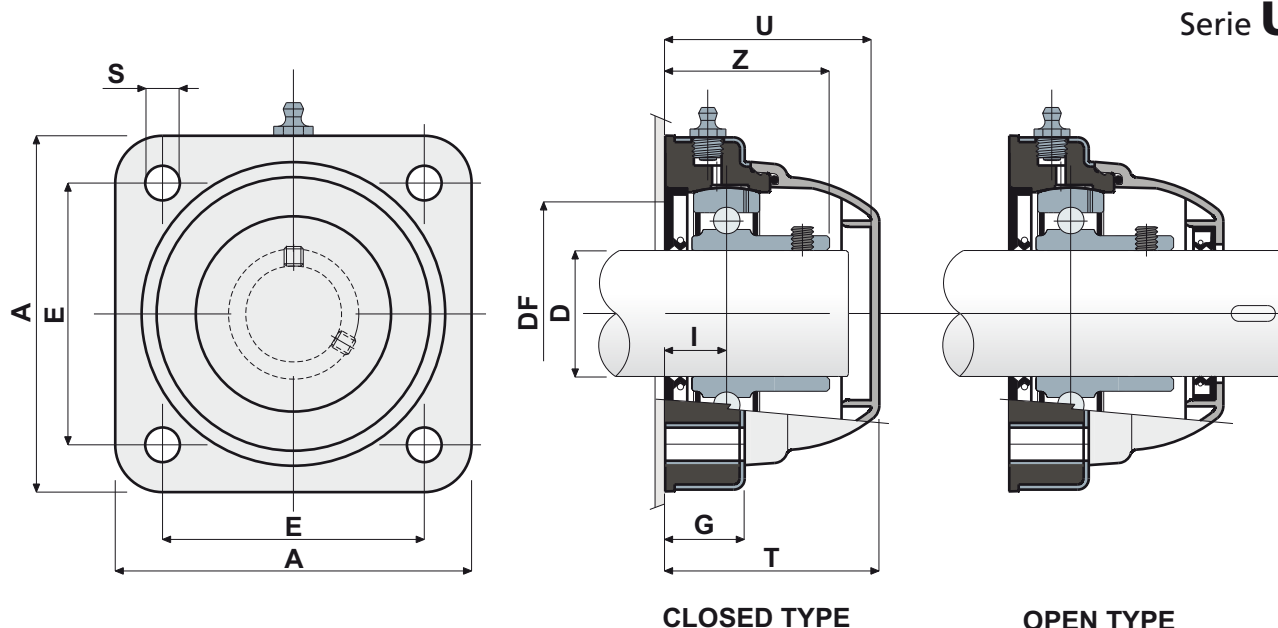

CHROME STEEL BEARING																
D	SERIES	CODES		DIMENSIONS (mm)								Bearing load (N)		Bearing support load		
		Closed type	Open type	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
30	UCF 206 CA	80409	80410	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
35	UCF 207 CA	80485	80486	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
40	UCF 208 CA	80411	80412	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440C																
D	SERIES	CODES		DIMENSIONS (mm)								Bearing load (N)		Bearing support load		
		Closed type	Open type	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
30	UCF 206 CA	80453	80464	83	113	11	27	20	41	65	68	60	50	12500	11200	17500
35	UCF 207 CA	81059	81060	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000
40	UCF 208 CA	80454	81061	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000

**MATERIALS:** Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

**FEATURES:** Full protection of bearing against external agents. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Protection covers in different colors and with customised brand; internal body in reinforced polypropylene white color; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




## Square flanged bearing supports

Serie **UCF/CXA**



External cover made out of stainless steel AISI 304; without protection cover

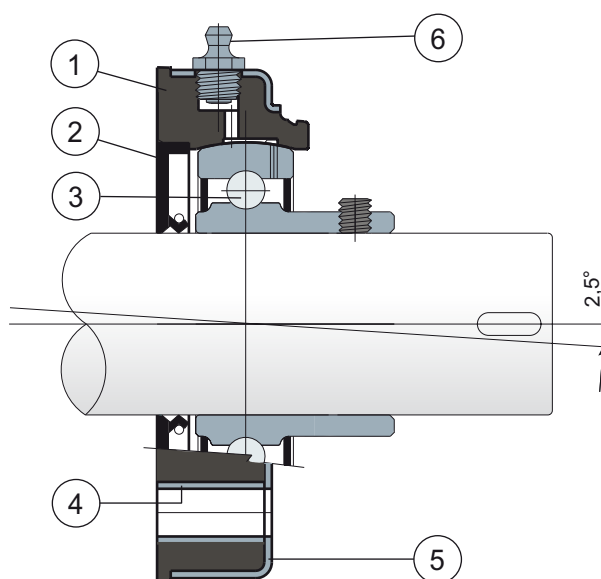

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCF/CA series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.







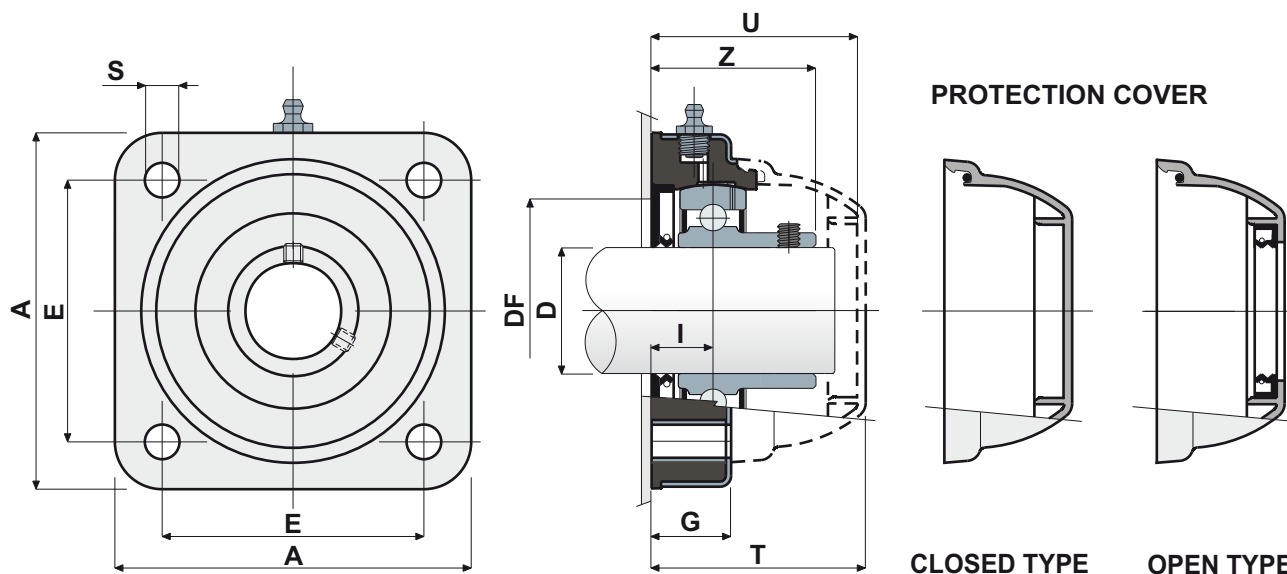

# Square flanged bearing supports

Technical data

Serie **UCF/CXA**



CHROME STEEL BEARING																		
D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES		
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type	
											Max	Min						
30	UCF 206 CXA	 80413	83	113	11	27	20	41	65	68	60	50	19500	11300	17500			80494
35	UCF 207 CXA	 80479	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000	80256		80495
40	UCF 208 CXA	 80414	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000			80257

STAINLESS STEEL BEARING AISI 440C																		
D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES		
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type	
											Max	Min						
30	UCF 206 CXA	 80499	83	113	11	27	20	41	65	68	60	50	12500	11200	17500			80494
35	UCF 207 CXA	 80500	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000	80256		80495
40	UCF 208 CXA	 80501	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000			80257

**MATERIALS:** Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

**FEATURES:** The only difference from UCF/CA series is lack of protection cover, which can be ordered separately as an accessory. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. Moreover this part is moulded without internal cavities in order to obtain the best sanitification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Protection covers in different colors and with customised brand; internal body in reinforced polypropylene white color; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




# Oval flanged bearing supports

Serie **UCFL/C**



Full protection of bearing

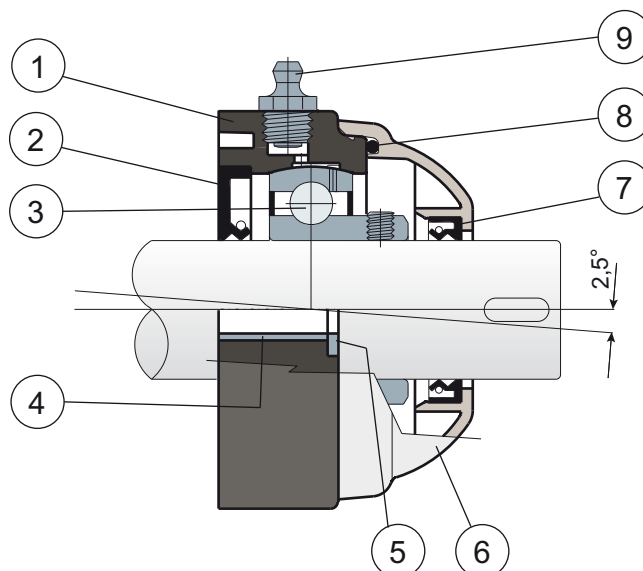

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Oval flanged bearing supports

Technical data

Serie **UCFL/C**

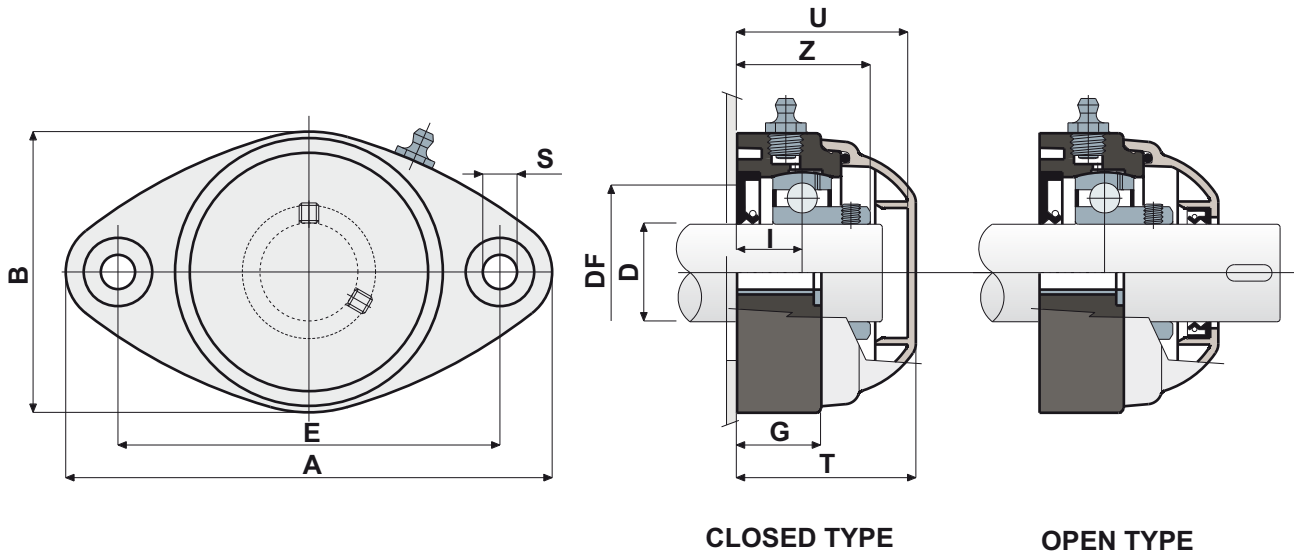

**CLOSED TYPE**

**OPEN TYPE**

CHROME STEEL BEARING																	
D	SERIES	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	UCFL 204 C	80262	80263	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	UCFL 205 C	80067	80071	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
30	UCFL 206 C	80068	80072	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
35	UCFL 207 C	80069	80073	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
STAINLESS STEEL BEARING AISI 440C																	
D	SERIES	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	UCFL 204 C	81062	81063	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	8500
25	UCFL 205 C	81064	81065	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000
30	UCFL 206 C	81066	81067	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000
35	UCFL 207 C	81068	81069	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Oval flanged bearing supports

Serie **UCFL/CX**



Without protection cover

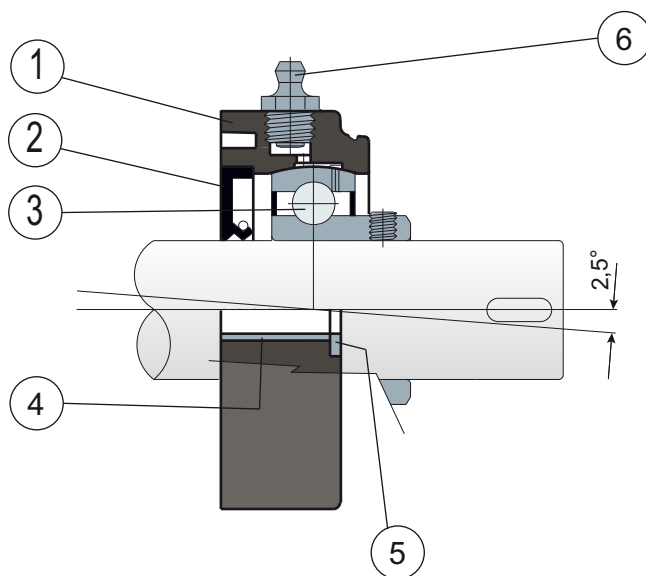

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCFL/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.






# Oval flanged bearing supports

## Technical data

Serie **UCFL/CX**

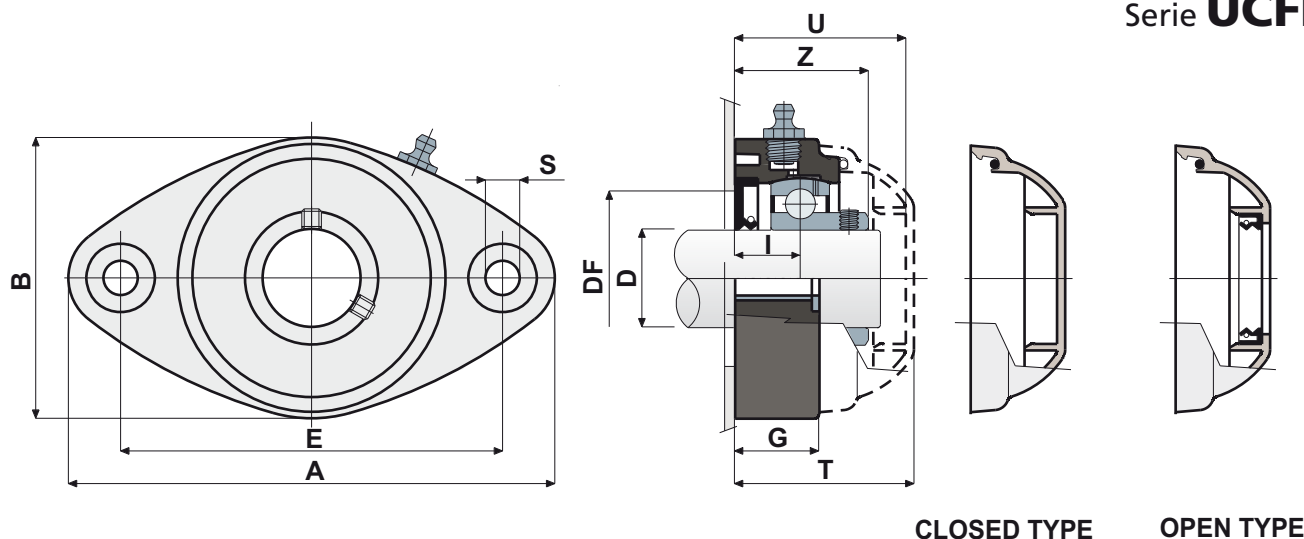

CLOSED TYPE

OPEN TYPE

CHROME STEEL BEARING																		
D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
20	UCFL 204 CX	80264	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255
25	UCFL 205 CX	80181	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	80075	80076
30	UCFL 206 CX	80182	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	80011	80053
35	UCFL 207 CX	80183	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000	80077	80078

STAINLESS STEEL BEARING AISI 440C																		
D	SERIES	Support CODES	DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
20	UCFL 204 CX	81053	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	8500	80254	80255
25	UCFL 205 CX	81054	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000	80075	80076
30	UCFL 206 CX	81055	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000	80011	80053
35	UCFL 207 CX	81056	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000	80077	80078

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCFL/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Oval flanged bearing supports

Serie **UCFL**



Without cover and back gasket

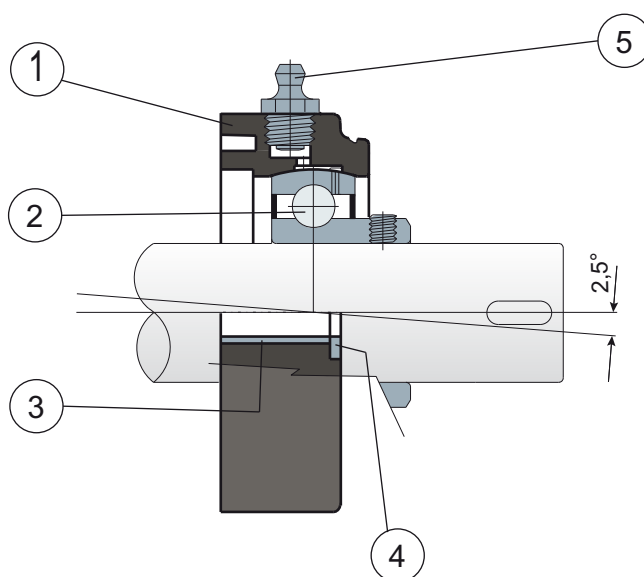

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCFL/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Oval flanged bearing supports

Technical data

Serie **UCFL**

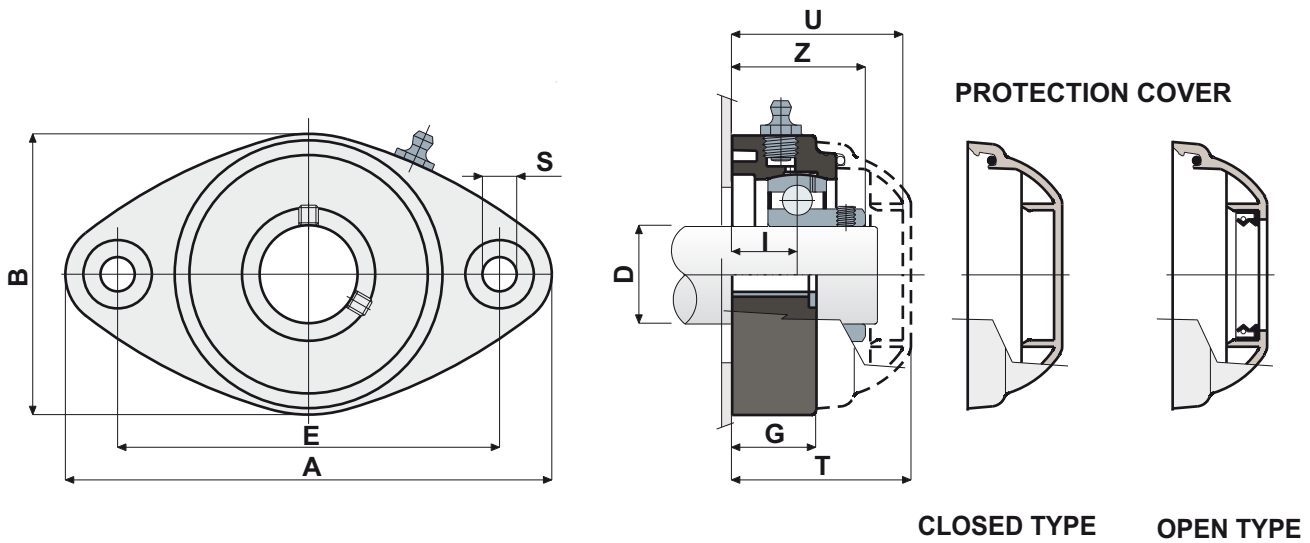

CHROME STEEL BEARING																
D	SERIES	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Bearing support load		COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type
20	UCFL 204	80265	90	118	64	10,5	19	15,5	33,5	44	46,5	12800	6600	8500	80254	80255
25	UCFL 205	80063	99	131	72	10,5	22	17	36	47	49	14000	7800	10000	80075	80076
30	UCFL 206	80064	117	149	86	10,5	26	20	41	54	56	19500	11300	13000	80011	80053
35	UCFL 207	80065	130	163	94	10,5	26	20	45	57	59	25500	15300	14000	80077	80078

STAINLESS STEEL BEARING AISI 440C																
D	SERIES	Support CODES	DIMENSIONS (mm)								Bearing load (N)		Bearing support load		COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type
20	UCFL 204	80519	90	118	64	10,5	19	15,5	33,5	44	46,5	8500	6550	8500	80254	80255
25	UCFL 205	80520	99	131	72	10,5	22	17	36	47	49	9150	7800	10000	80075	80076
30	UCFL 206	80521	117	149	86	10,5	26	20	41	54	56	12500	11200	13000	80011	80053
35	UCFL 207	80522	130	163	94	10,5	26	20	45	57	59	16600	15300	14000	80077	80078

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCFL/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Oval flanged bearing supports

Serie **UCFL/CS**



Back gasket for shouldered shaft

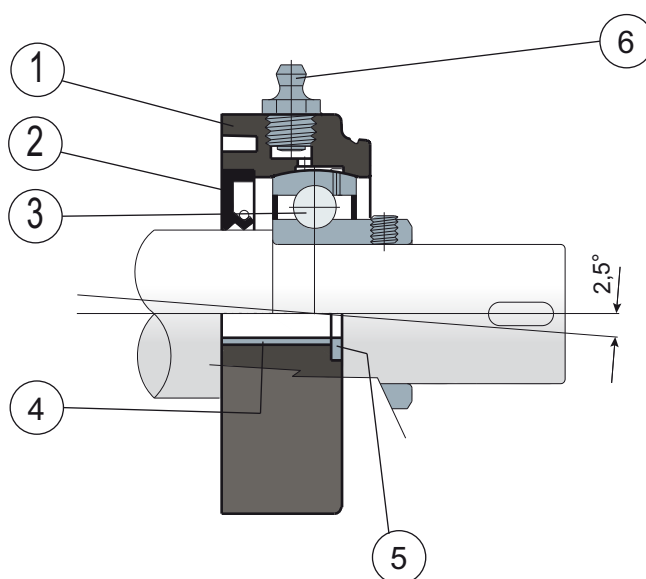

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Oval flanged bearing supports

Technical data

Serie **UCFL/CS**

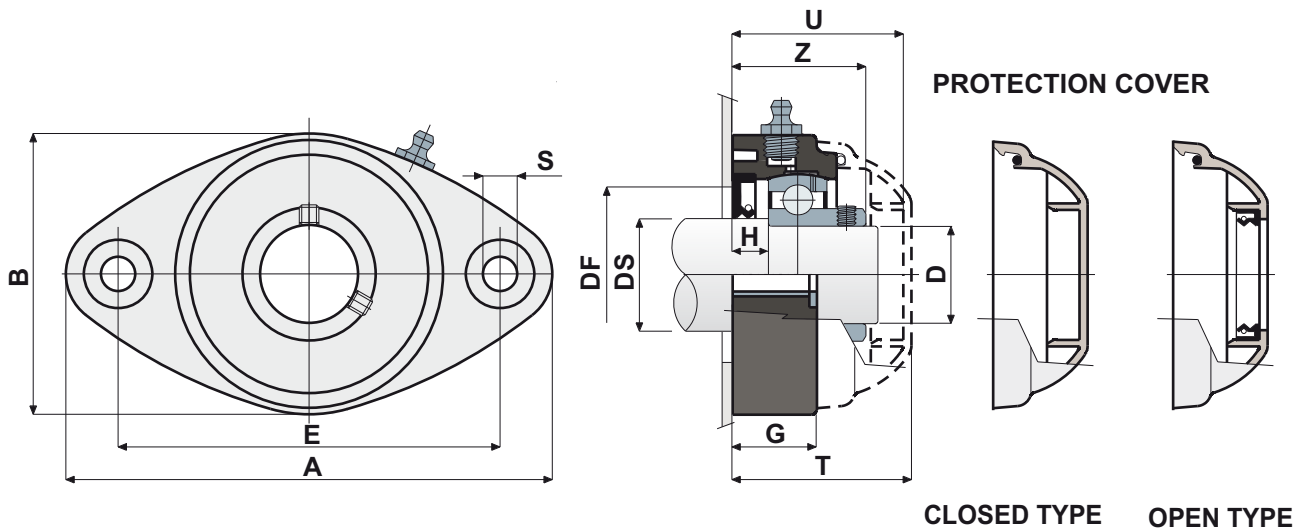

CHROME STEEL BEARING																			
DS	D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)	COVER CODES	
				E	A	B	S	G	H	Z	U	T	DF		C	C0		Closed type	Open type
25	20	UCFL 204 CS	80266	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255
30	25	UCFL 205 CS	80184	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000	80075	80076
35	30	UCFL 206 CS	80185	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000	80011	80053
40	35	UCFL 207 CS	80186	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000	80077	80078

STAINLESS STEEL BEARING AISI 440C																			
DS	D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)	COVER CODES	
				E	A	B	S	G	H	Z	U	T	DF		C	C0		Closed type	Open type
25	20	UCFL 204 CS	84148	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255
30	25	UCFL 205 CS	83907	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000	80075	80076
35	30	UCFL 206 CS	80523	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000	80011	80053
40	35	UCFL 207 CS	84150	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000	80077	80078

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** Back gasket for shouldered shafts. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Oval flanged bearing supports

Series **MUCFL/C**



Full protection of bearing

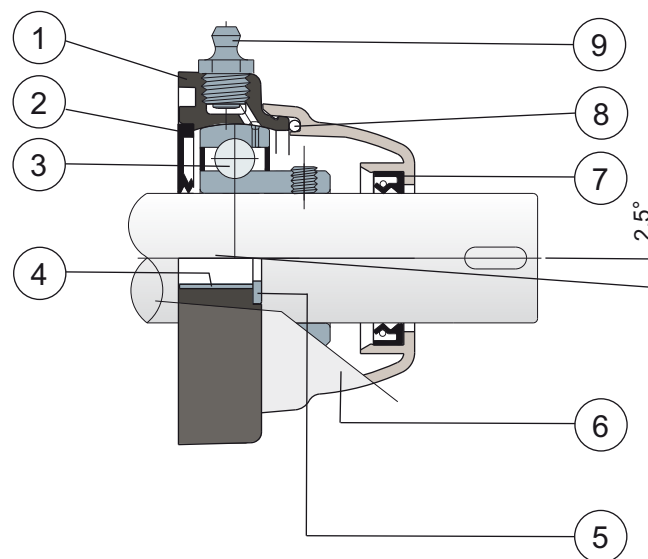

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Oval flanged bearing supports

Technical data

Serie **MUCFL/C**

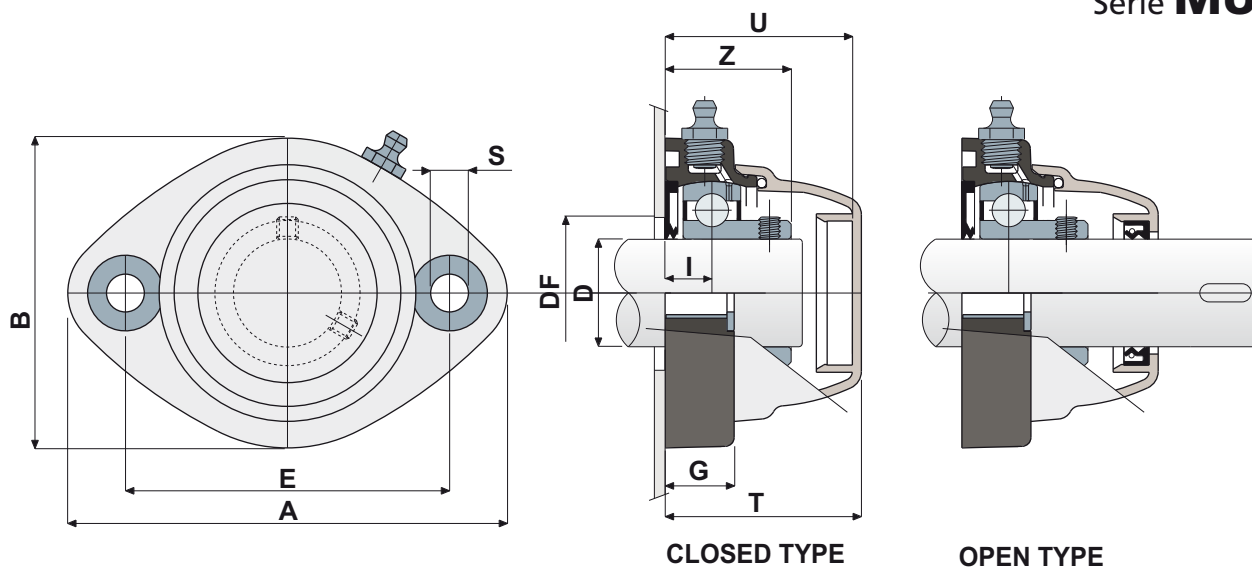

CHROME STEEL BEARING																	
D	SERIES	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	MUCFL 204 C	82858	82857	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
25	MUCFL 205 C	82860	82859	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	MUCFL 206 C	82409	82408	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	MUCFL 207 C	84014	83989	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	MUCFL 208 C	84015	83990	117	147	112	10,5	27	20	48,5	65,5	68	78	65	30700	19000	15000

STAINLESS STEEL BEARING AISI 440C																	
D	SERIES	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	MUCFL 204 C	82870	82869	90	122	86	10,5	19	16	34	44	46,5	45	40	8300	6550	8500
25	MUCFL 205 C	82868	82867	90	122	86	10,5	19	15,5	35	44	46,5	50	45	9150	7800	10000
30	MUCFL 206 C	82767	82766	90	122	86	10,5	19	13	35	52	54,5	60	50	12500	11200	13000
35	MUCFL 207 C	84017	84018	117	147	112	10,5	27	20	45,3	57	59,6	70	55	16600	15300	14000
40	MUCFL 208 C	84016	83991	117	147	112	10,5	27	20	48,5	65,5	68	78	65	20000	19000	15000

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing, greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.






## Oval flanged bearing supports

Serie **MUCFL/CX**



Without protection cover

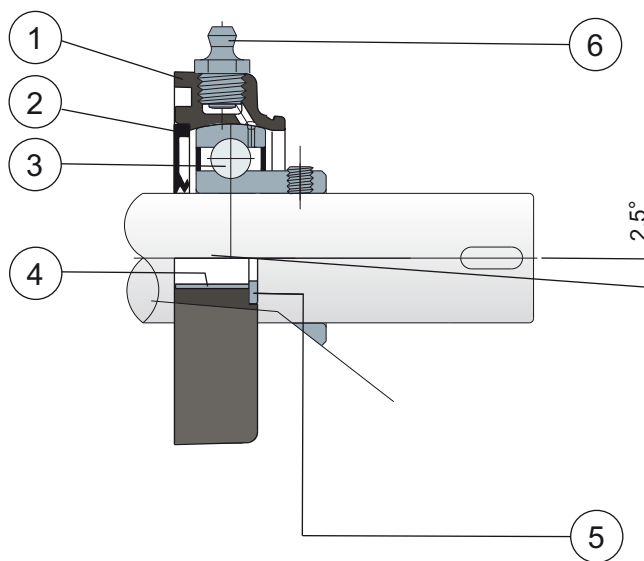

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from MUCFL/C series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Oval flanged bearing supports

Technical data

Serie **MUCFL/CX**

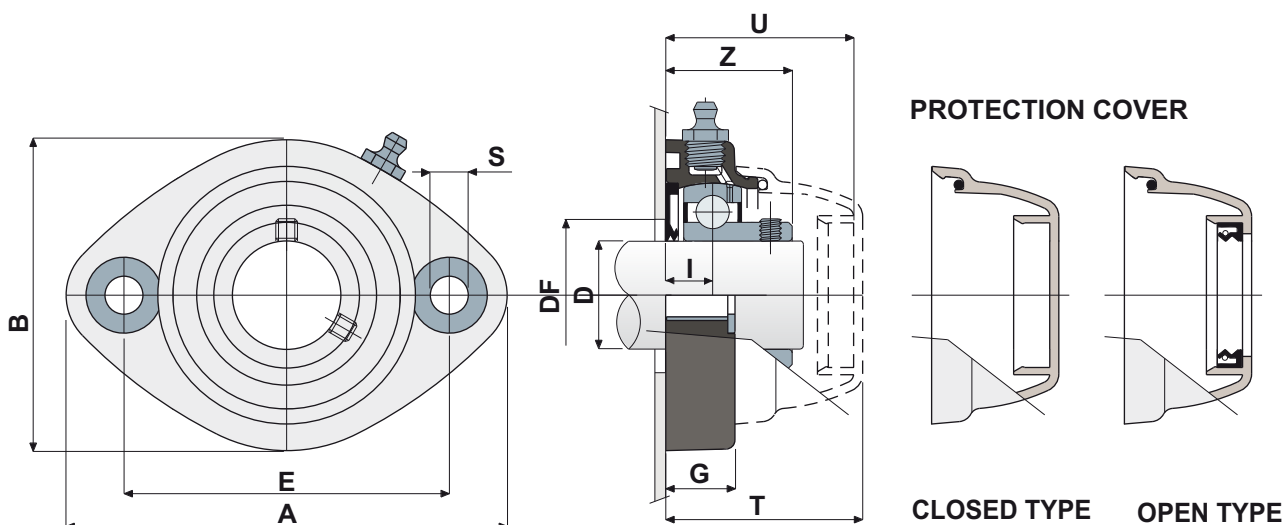

CHROME STEEL BEARING																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
20	MUCFL 204 CX	83035	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500	80254	80255
25	MUCFL 205 CX	83036	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000	80075	80076
30	MUCFL 206 CX	80540	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000	82765	82764
35	MUCFL 207 CX	83992	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000	80077	80078
40	MUCFL 208 CX	83993	117	147	112	10,5	27	20	48,5	65,5	68	78	65	30700	19000	15000	80256	80257
STAINLESS STEEL BEARING AISI 440C																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
20	MUCFL 204 CX	83045	90	122	86	10,5	19	16	34	44	46,5	45	40	8300	6550	8500	80254	80255
25	MUCFL 205 CX	83046	90	122	86	10,5	19	15,5	35	44	46,5	50	45	9150	7800	10000	80075	80076
30	MUCFL 206 CX	83047	90	122	86	10,5	19	13	35	52	54,5	60	50	12500	11200	13000	82765	82764
35	MUCFL 207 CX	84019	117	147	112	10,5	27	20	45,3	57	59,6	70	55	16600	15300	14000	80077	80078
40	MUCFL 208 CX	83994	117	147	112	10,5	27	20	48,5	65,5	68	78	65	20000	19000	15000	80256	80257

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from MUCFL/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Oval flanged bearing supports

Serie **MUCFL**



Without cover and back gasket

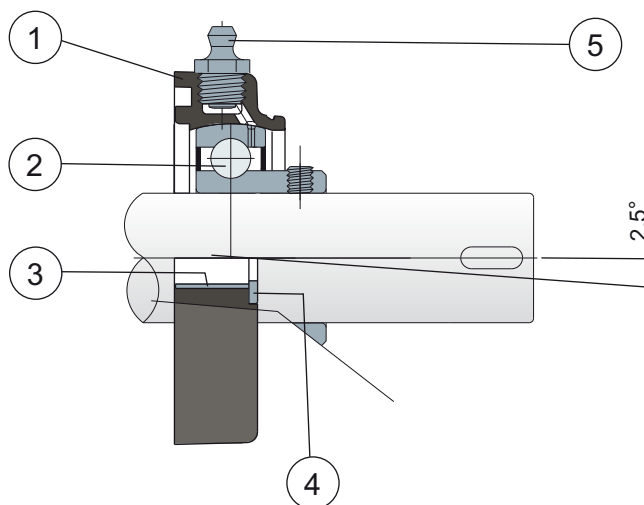

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from MUCFL/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Oval flanged bearing supports

Technical data

Serie **MUCFL**

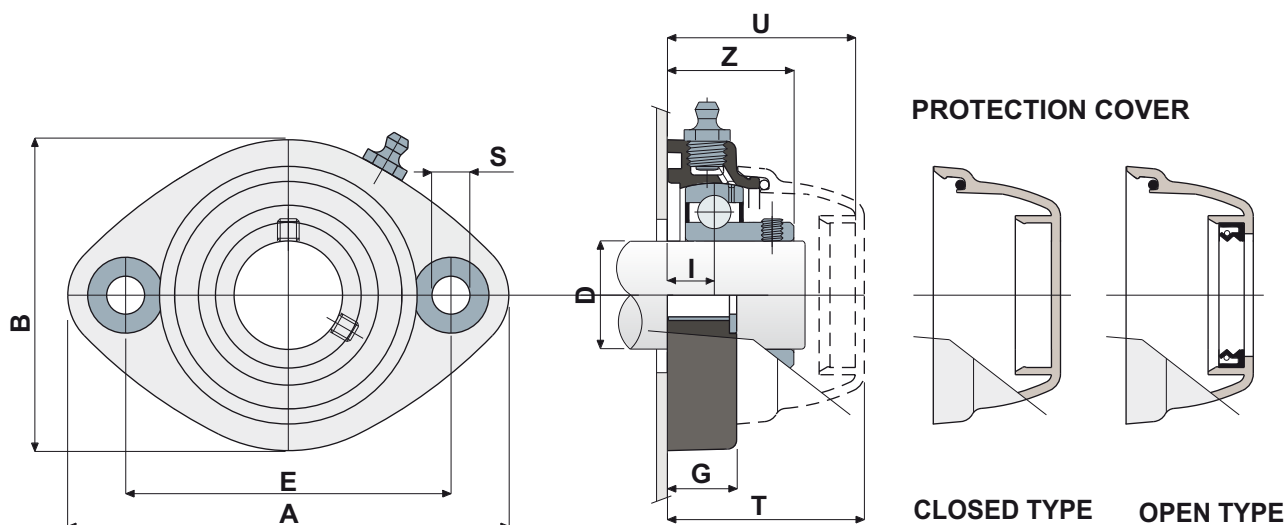

CHROME STEEL BEARING																
D	SERIES	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Bearing support load	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type
20	MUCFL 204	83037	90	122	86	10,5	19	16	34	44	46,5	12800	6600	8500	80254	80255
25	MUCFL 205	83038	90	122	86	10,5	19	15,5	35	44	46,5	14000	7800	10000	80075	80076
30	MUCFL 206	80542	90	122	86	10,5	19	13	35	52	54,5	19500	11300	13000	82765	82764
35	MUCFL 207	83995	117	147	112	10,5	27	20	45,3	57	59,6	25500	15300	14000	80077	80078
40	MUCFL 208	83996	117	147	112	10,5	27	20	48,5	65,5	68	30700	19000	15000	80256	80257

STAINLESS STEEL BEARING AISI 440C																
D	SERIES	Support CODES	DIMENSIONS (mm)									Bearing load (N)		Bearing support load	COVER CODES	
			E	A	B	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type
20	MUCFL 204	83048	90	122	86	10,5	19	16	34	44	46,5	8300	6550	8500	80254	80255
25	MUCFL 205	83049	90	122	86	10,5	19	15,5	35	44	46,5	9150	7800	10000	80075	80076
30	MUCFL 206	83050	90	122	86	10,5	19	13	35	52	54,5	12500	11200	13000	82765	82764
35	MUCFL 207	84020	117	147	112	10,5	27	20	45,3	57	59,6	16600	15300	14000	80077	80078
40	MUCFL 208	83997	117	147	112	10,5	27	20	48,5	65,5	68	20000	19000	15000	80256	80257

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from MUCFL/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Oval flanged bearing supports

Serie **UCFL/CA**



External cover made out of stainless steel AISI 304

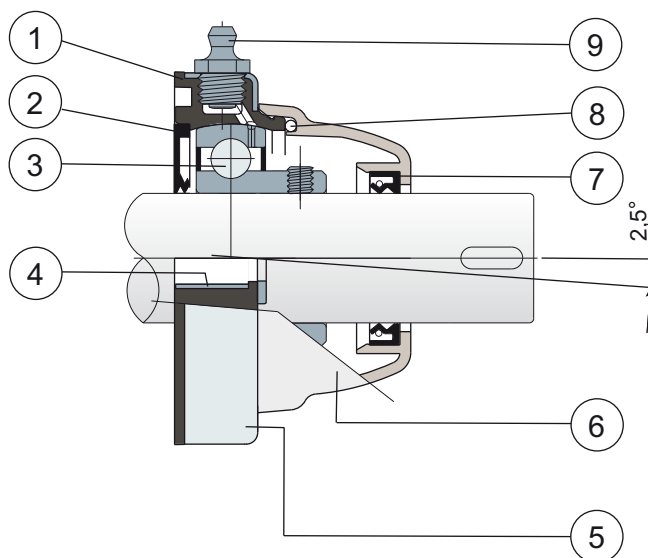

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.







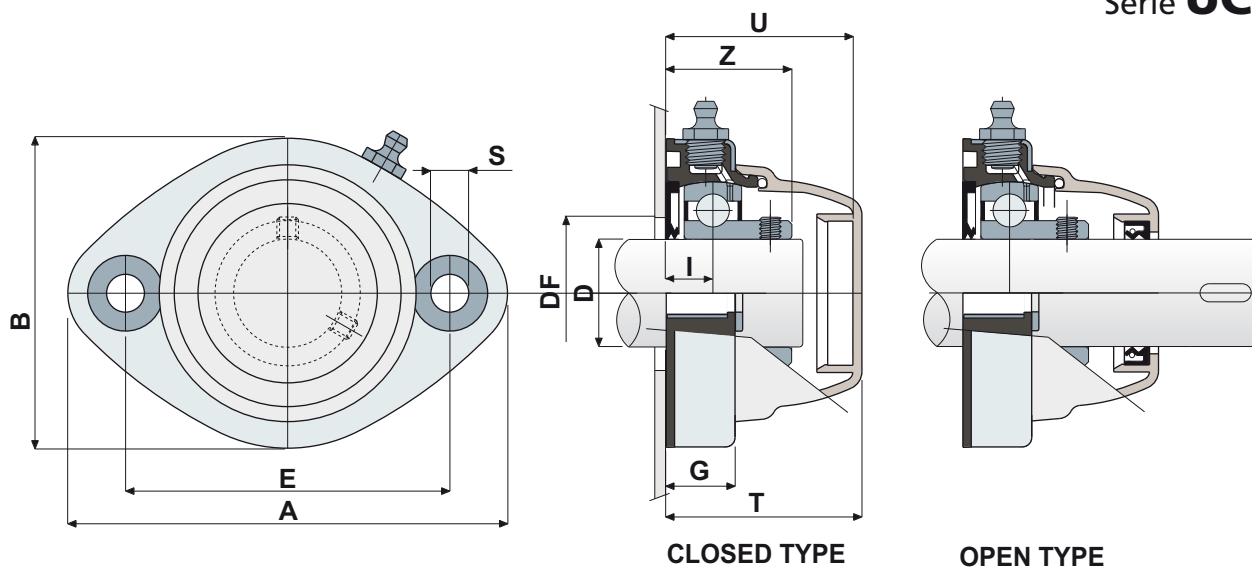

# Oval flanged bearing supports

Technical data

Serie **UCFL/CA**



CHROME STEEL BEARING																	
D	SERIES	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
30	UCFL 206 CA	 84021	83999	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000
35	UCFL 207 CA	 84022	84000	117	147	112	11	27	20	45,3	65,5	68	70	55	25500	15300	14000
40	UCFL 208 CA	 84023	84001	117	147	112	11	27	20	48,5	65,5	68	78	65	30700	19000	15000

STAINLESS STEEL BEARING AISI 440C																	
D	SERIES	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
30	UCFL 206 CA	 84024	84002	117	147	112	11	27	21	42	65,5	68	60	50	12500	11200	13000
35	UCFL 207 CA	 84006	84003	117	147	112	11	27	20	45,3	65,5	68	70	55	16600	15300	14000
40	UCFL 208 CA	 84010	84005	117	147	112	11	27	20	48,5	65,5	68	78	65	20000	19000	15000

**MATERIALS:** Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

**FEATURES:** Full protection of bearing against external agents. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanitation. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Protection covers in different colors and with customised brand; internal body in reinforced polypropylene white color; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




# Oval flanged bearing supports

Serie **UCFL/CXA**



External cover made out of stainless steel AISI 304; without protection cover

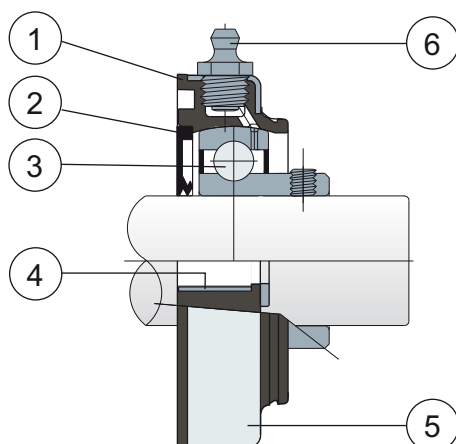

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCFL/CA series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.












# Oval flanged bearing supports

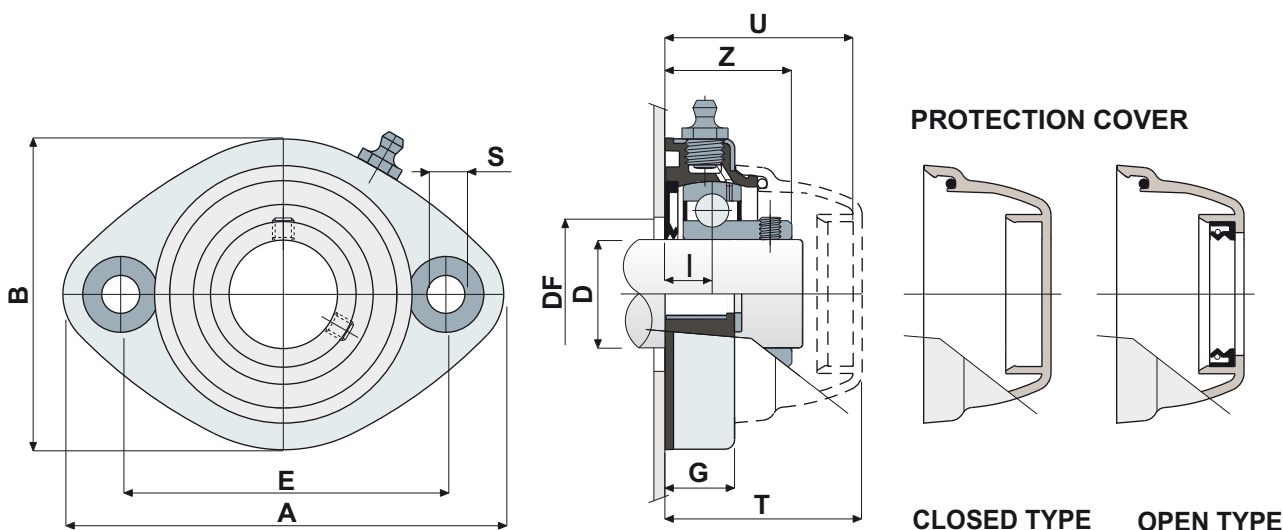Technical data

Serie **UCFL/CXA**



CHROME STEEL BEARING																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
30	UCFL 206 CXA	 84007	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000		80494
35	UCFL 207 CXA	 84008	117	147	112	11	27	20	45,3	65,5	68	70	55	25500	15300	14000	80256	80495
40	UCFL 208 CXA	 84009	117	147	112	11	27	20	48,5	65,5	68	78	65	30700	19000	15000		80257
STAINLESS STEEL BEARING AISI 440C																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
30	UCFL 206 CXA	 84011	117	147	112	11	27	21	42	65,5	68	60	50	12500	11200	13000		80494
35	UCFL 207 CXA	 84012	117	147	112	11	27	20	45,3	65,5	68	70	55	16600	15300	14000	80256	80495
40	UCFL 208 CXA	 84013	117	147	112	11	27	20	48,5	65,5	68	78	65	20000	19000	15000		80257

**MATERIALS:** Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

**FEATURES:** The only difference from UCFL/CA series is lack of protection cover, which can be ordered separately as an accessory. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Protection covers in different colors and with customized brand; internal body in reinforced polypropylene white color; box quantity according to your request.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




## Side flanged bearing supports

Serie **UCFB/C**



Full protection of bearing

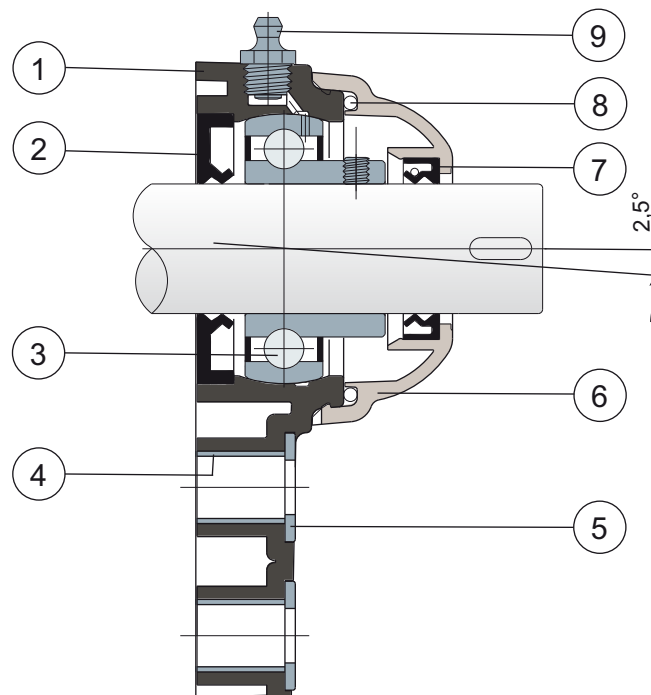

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser for relubrication made out of nickel-plated brass.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Side flanged bearing supports

Technical data

Serie **UCFB/C**

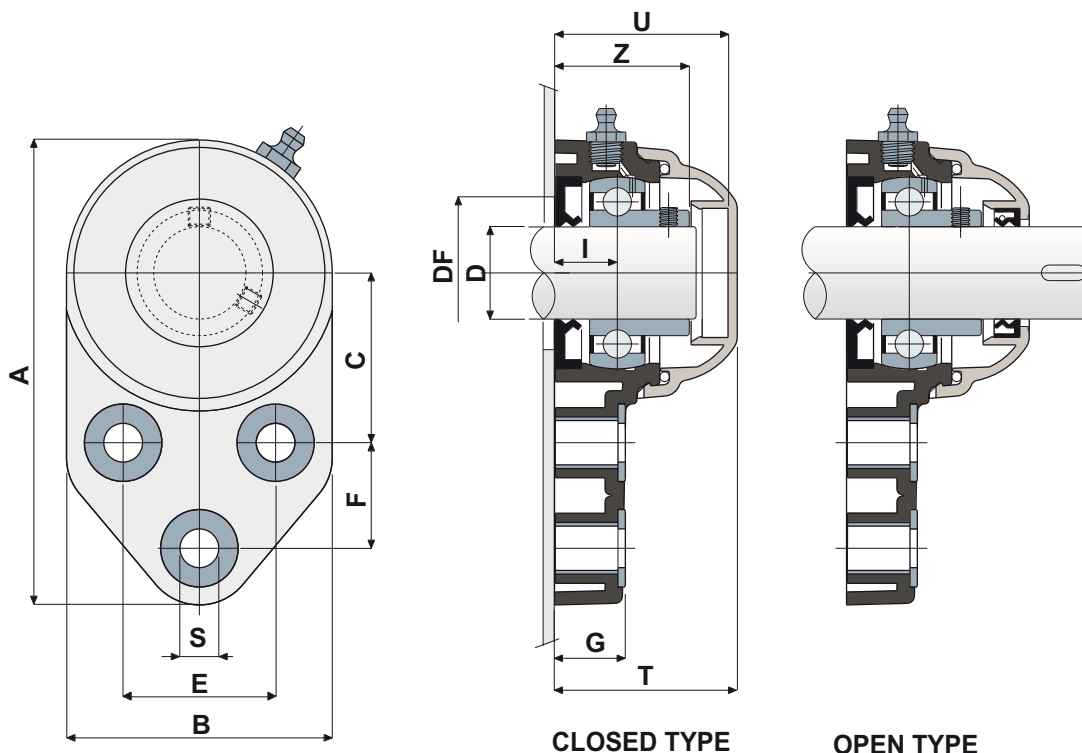

**CLOSED TYPE**

**OPEN TYPE**

CHROME STEEL BEARING																			
D	SERIES	CODES		DIMENSIONS (mm)												Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	C	F	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	UCFB 204 C	82862	82861	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45 40	12800	6600	8500	
25	UCFB 205 C	82771	82770	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50 45	14000	7800	9000	
30	UCFB 206 C	84048	84049	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60 50	19500	11300	11000	
35	UCFB 207 C	84050	84051	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70 55	25500	15300	13000	
40	UCFB 208 C	83031	83033	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78 65	32500	19800	18000	

STAINLESS STEEL BEARING AISI 440C																			
D	SERIES	CODES		DIMENSIONS (mm)												Bearing load (N)		Bearing support load	
		Closed type	Open type	E	A	B	C	F	S	G	I	Z	U	T	DF Max Min	C	C0	(N)	
20	UCFB 204 C	82866	82865	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45 40	8300	6550	8500	
25	UCFB 205 C	82775	82774	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50 45	9150	7800	9000	
30	UCFB 206 C	84052	84053	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60 50	12500	11200	11000	
35	UCFB 207 C	84054	84055	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70 55	16600	15300	13000	
40	UCFB 208 C	83040	83027	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78 65	20000	19000	18000	

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing, greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Side flanged bearing supports

Serie **UCFB/CX**



Without protection cover

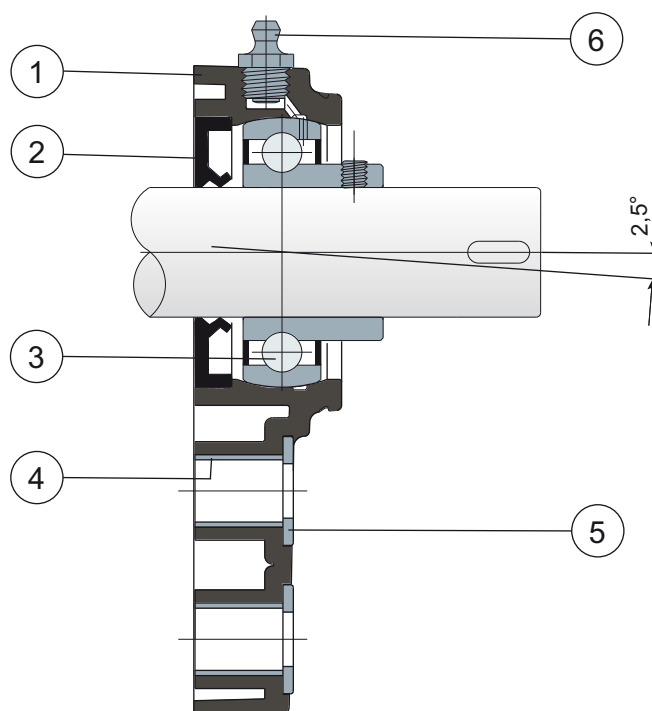

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440C.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCFB/C series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Side flanged bearing supports

Technical data

Serie **UCFB/CX**

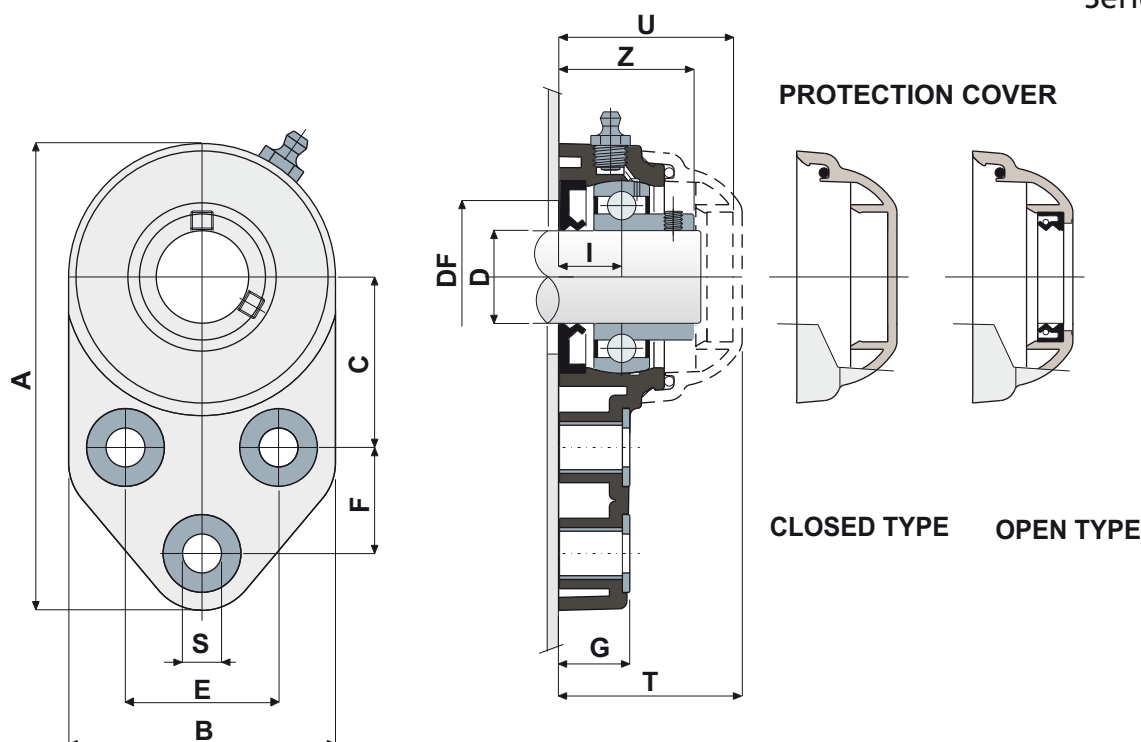

CHROME STEEL BEARING																				
D	SERIES	Support CODES	DIMENSIONS (mm)												Bearing load (N)		Bearing support load	COVER CODES		
			E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
														Max	Min					
20	UCFB 204 CX	83023	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	80254	80255
25	UCFB 205 CX	82772	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	80075	80076
30	UCFB 206 CX	84056	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11300	11000	80011	80053
35	UCFB 207 CX	84057	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	25500	15300	13000	80077	80078
40	UCFB 208 CX	82478	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	80256	80257

STAINLESS STEEL BEARING AISI 440C																				
D	SERIES	Support CODES	DIMENSIONS (mm)													Bearing load (N)		Bearing support load	COVER CODES	
			E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
														Max	Min					
20	UCFB 204 CX	83039	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	8300	6550	8500	80254	80255
25	UCFB 205 CX	82776	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	9150	7800	9000	80075	80076
30	UCFB 206 CX	84058	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	12500	11200	11000	80011	80053
35	UCFB 207 CX	84059	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	16600	15300	13000	80077	80078
40	UCFB 208 CX	83041	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	20000	19000	18000	80256	80257

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCFB/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Side flanged bearing supports

Serie **UCFB**



Without cover and back gasket

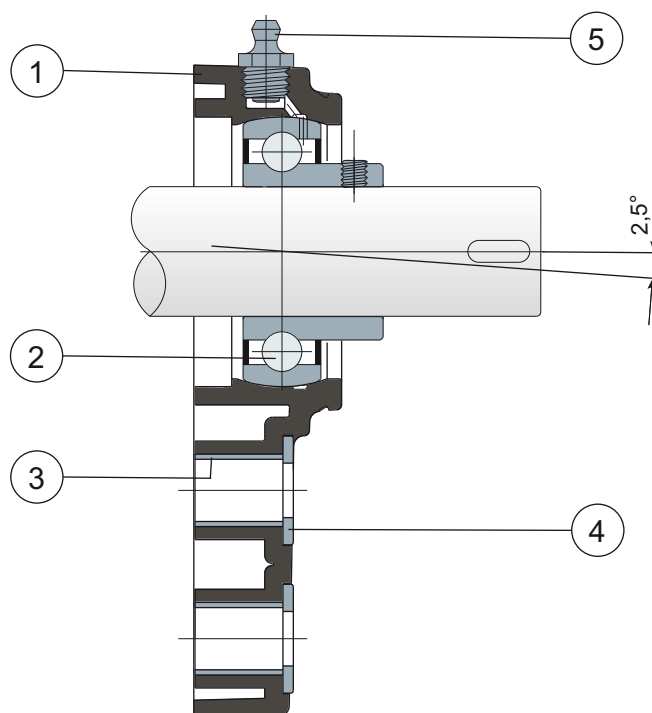

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCFB/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



# Side flanged bearing supports

Technical data

Serie **UCFB**

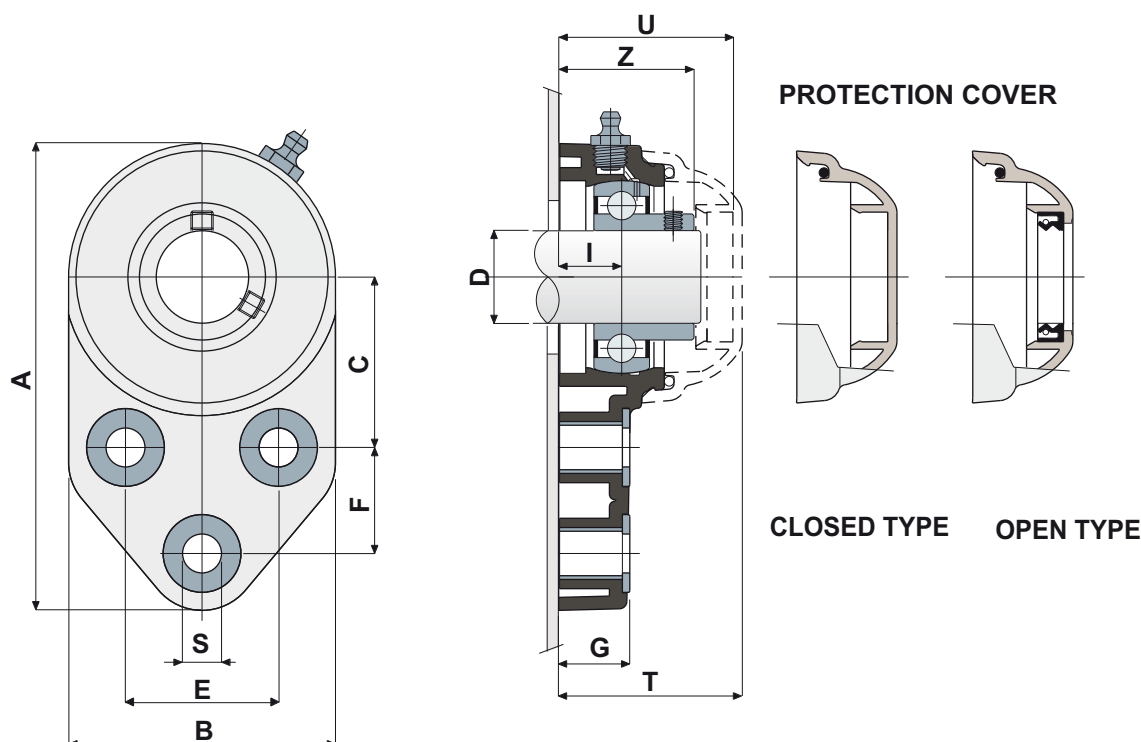

CHROME STEEL BEARING																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)	COVER CODES	
			E	A	B	C	F	S	G	I	Z	U	T	C	C0		Closed type	Open type
20	UCFB 204	83025	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	12800	6600	8500	80254	80255
25	UCFB 205	82773	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	14000	7800	9000	80075	80076
30	UCFB 206	84060	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	19500	11300	11000	80011	80053
35	UCFB 207	84061	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	25500	15300	13000	80077	80078
40	UCFB 208	83029	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	32500	19800	18000	80256	80257

STAINLESS STEEL BEARING AISI 440C																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)	COVER CODES	
			E	A	B	C	F	S	G	I	Z	U	T	C	C0		Closed type	Open type
20	UCFB 204	83042	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	8300	6550	8500	80254	80255
25	UCFB 205	82777	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	9150	7800	9000	80075	80076
30	UCFB 206	84062	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	12500	11200	11000	80011	80053
35	UCFB 207	84063	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	16600	15300	13000	80077	80078
40	UCFB 208	83044	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	20000	19000	18000	80256	80257

**MATERIALS:** Support made out of PA + glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCFB/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




# Pillow Blocks

Serie **UCP/C**



Full protection of bearing

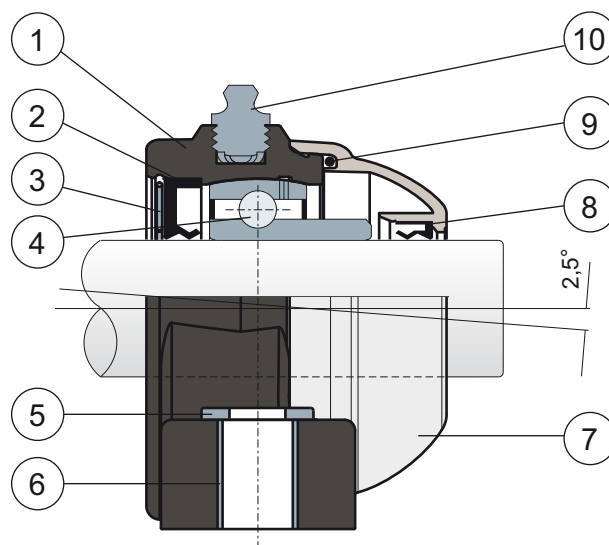

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Safety ring in stainless steel AISI 304.
- 4) Chrome steel or stainless steel bearing AISI 440C.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 7) Protection cover made out of polypropylene (grey colour Ral 7042).
- 8) Front gasket made out of NBR rubber for turning shaft seal.
- 9) OR gasket made out of NBR rubber.
- 10) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.

For further information please contact our technical office or sales department.






# Pillow Blocks

## Technical data

Serie **UCP/C**

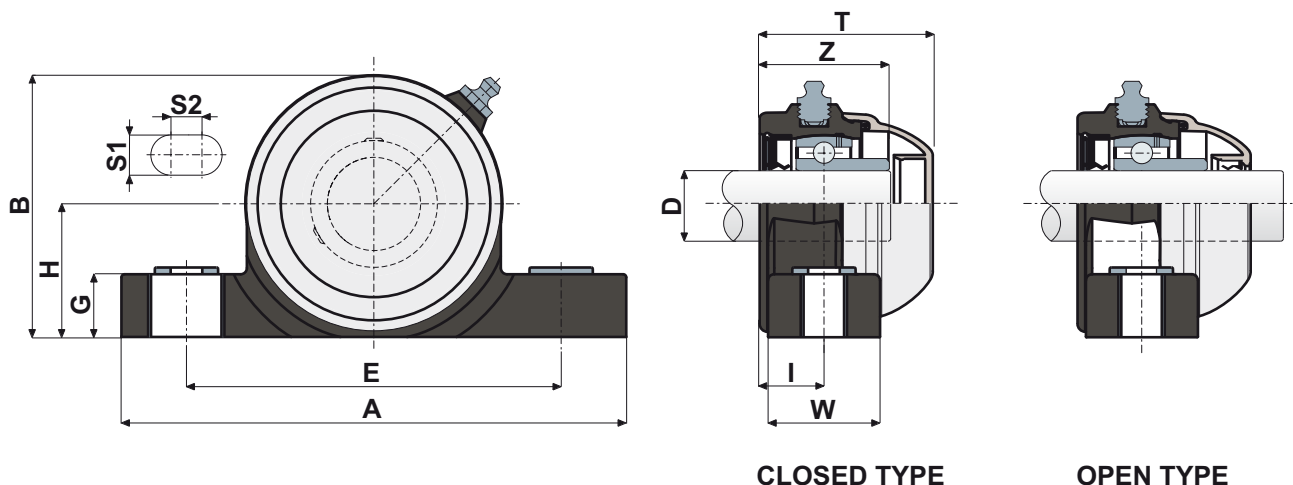

**CLOSED TYPE**

**OPEN TYPE**

CHROME STEEL BEARING																	
D	SERIES	CODES		DIMENSIONS (mm)											Bearing load (N)		Bearing support load
		Closed type	Open type	E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	(N)
20	UCP 204 C	<b>84076</b>	<b>84077</b>	96	130	13	10	20	33,5	65,5	18	30	36	49	12800	6600	5750
25	UCP 205 C	<b>83682</b>	<b>83683</b>	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900
30	UCP 206 C	<b>83684</b>	<b>83685</b>	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11300	9200
35	UCP 207 C	<b>83686</b>	<b>83687</b>	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	25500	15300	11500

STAINLESS STEEL BEARING AISI 440C																	
D	SERIES	CODES		DIMENSIONS (mm)											Bearing load (N)		Bearing support load
		Closed type	Open type	E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	(N)
20	UCP 204 C	<b>84078</b>	<b>84079</b>	96	130	13	10	20	33,5	65,5	18	30	36	49	8300	6550	5750
25	UCP 205 C	<b>83696</b>	<b>83697</b>	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	9150	7800	6900
30	UCP 206 C	<b>83698</b>	<b>83699</b>	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	12500	11200	9200
35	UCP 207 C	<b>83700</b>	<b>83701</b>	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	16600	15300	11500

**MATERIALS:** Support made out of PA+glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings, washers and safety ring made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** Full protection of bearing against external agents. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2,5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




# Pillow Blocks

Serie **UCP/CX**



Without protection cover

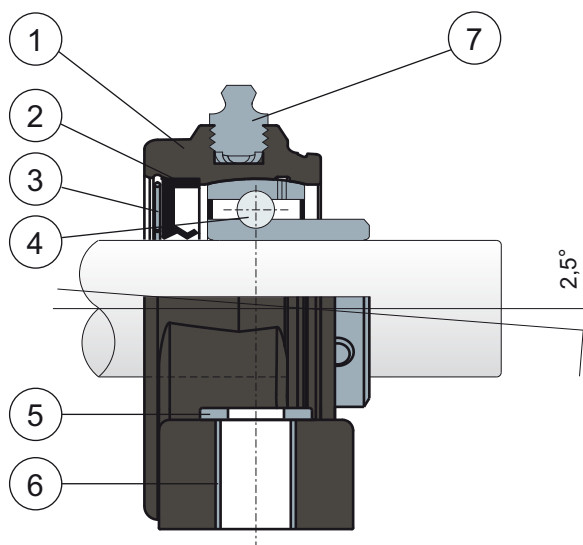

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Safety ring in stainless steel AISI 304.
- 4) Chrome steel or stainless steel bearing AISI 440C.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 7) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



# Pillow Blocks

## Technical data

Serie **UCP/CX**

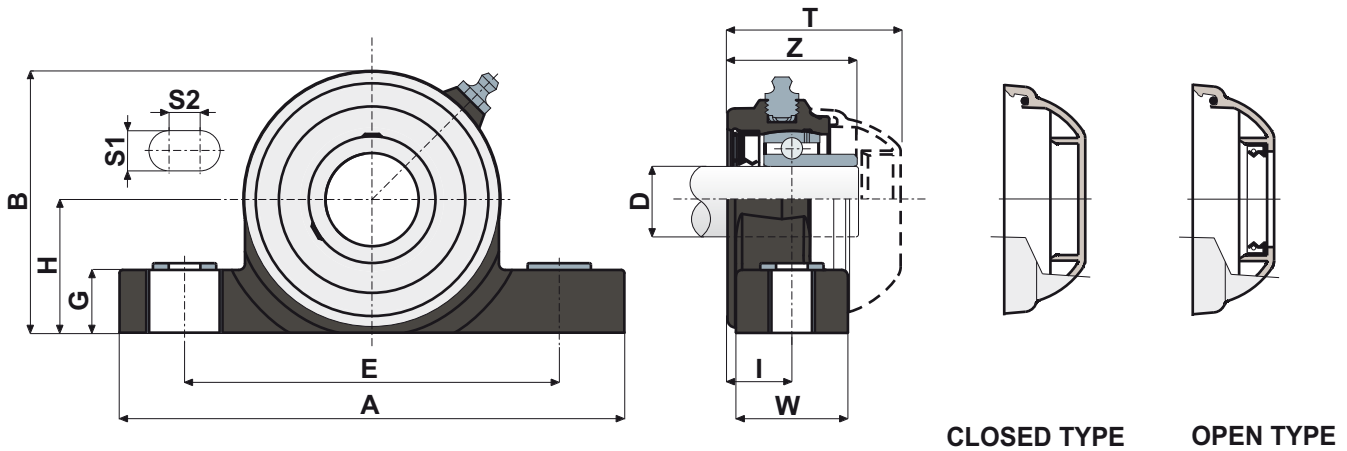

**CLOSED TYPE**

**OPEN TYPE**

CHROME STEEL BEARING																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	(N)	Closed type	Open type
20	UCP 204 CX	<b>84080</b>	96	130	13	10	20	33,5	65,5	18	30	36	49	12800	6600	5750	<b>80254</b>	<b>80255</b>
25	UCP 205 CX	<b>83688</b>	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900	<b>80075</b>	<b>80076</b>
30	UCP 206 CX	<b>83689</b>	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11300	9200	<b>80011</b>	<b>80053</b>
35	UCP 207 CX	<b>83690</b>	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	25500	15300	11500	<b>80077</b>	<b>80078</b>
STAINLESS STEEL BEARING AISI 440C																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	(N)	Closed type	Open type
20	UCP 204 CX	<b>84081</b>	96	130	13	10	20	33,5	65,5	18	30	36	49	8300	6550	5750	<b>80254</b>	<b>80255</b>
25	UCP 205 CX	<b>83702</b>	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	9150	7800	6900	<b>80075</b>	<b>80076</b>
30	UCP 206 CX	<b>83703</b>	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	12500	11200	9200	<b>80011</b>	<b>80053</b>
35	UCP 207 CX	<b>83704</b>	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	16600	15300	11500	<b>80077</b>	<b>80078</b>

**MATERIALS:** Support made out of PA+glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings, washers and safety ring made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCP/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2,5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.




## Pillow Blocks

Serie **UCP**



Without cover and back gasket

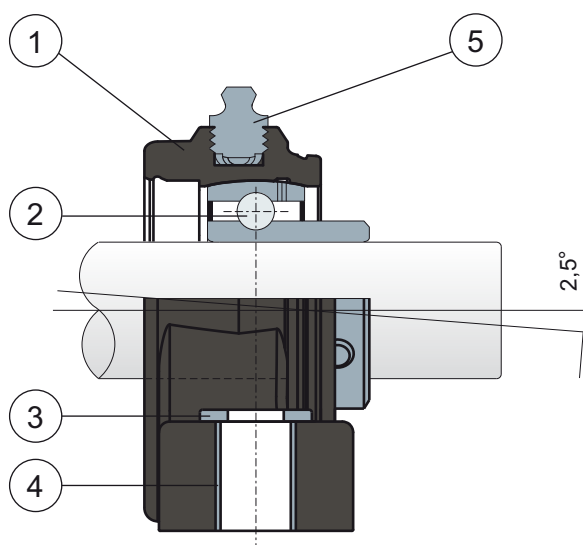

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440C.
- 3) UNI 6592 support washer made out of stainless steel AISI 304.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) Greaser for relubrication made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



# Pillow Blocks

## Technical data

Serie **UCP**

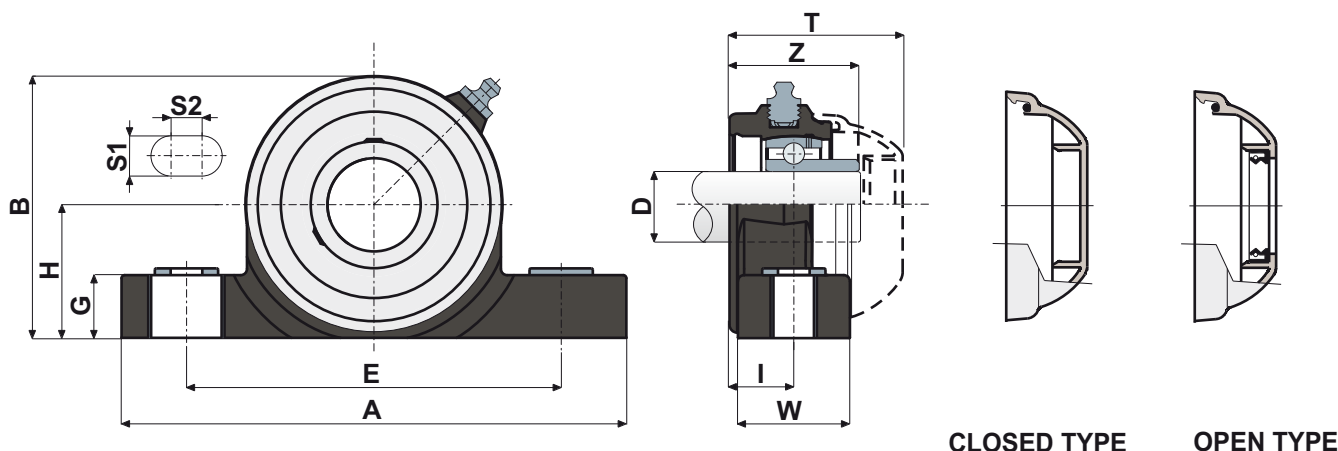

**CLOSED TYPE**

**OPEN TYPE**

CHROME STEEL BEARING																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	(N)	Closed type	Open type
20	UCP 204	<b>84082</b>	96	130	13	10	20	33,5	65,5	18	30	36	49	12800	6600	5750	<b>80254</b>	<b>80255</b>
25	UCP 205	<b>83691</b>	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900	<b>80075</b>	<b>80076</b>
30	UCP 206	<b>83692</b>	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11300	9200	<b>80011</b>	<b>80053</b>
35	UCP 207	<b>83693</b>	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	25500	15300	11500	<b>80077</b>	<b>80078</b>

STAINLESS STEEL BEARING AISI 440C																		
D	SERIES	Support CODES	DIMENSIONS (mm)											Bearing load (N)		Bearing support load	COVER CODES	
			E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	(N)	Closed type	Open type
20	UCP 204	84083	96	130	13	10	20	33,5	65,5	18	30	36	49	8300	6550	5750	80254	80255
25	UCP 205	83705	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	9150	7800	6900	80075	80076
30	UCP 206	83706	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	12500	11200	9200	80011	80053
35	UCP 207	83707	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	16600	15300	11500	80077	80078

**MATERIALS:** Support made out of PA+glass fiber black colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCP/C series is lack of back gasket and protection covers, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2,5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customised brand; box quantity according to your request.