




Round flanged bearing supports

Serie **UCFC/C**



Full protection of bearing

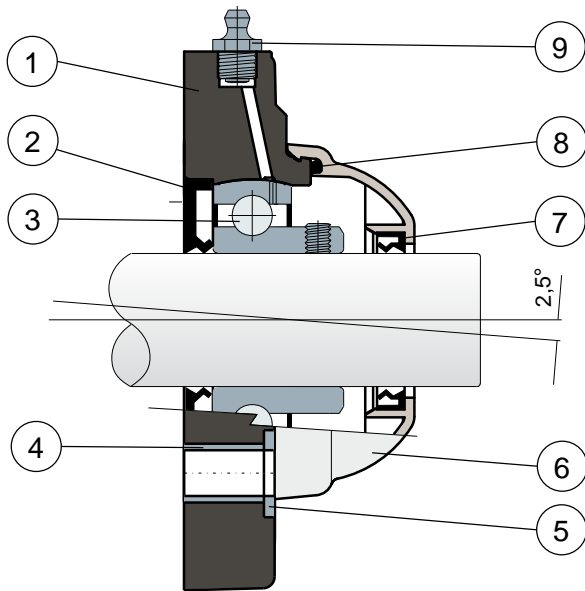

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber.
- 9) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.


Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°.
For further information please contact our technical office or sales department.



Round flanged bearing supports

Technical data

Serie **UCFC/C**

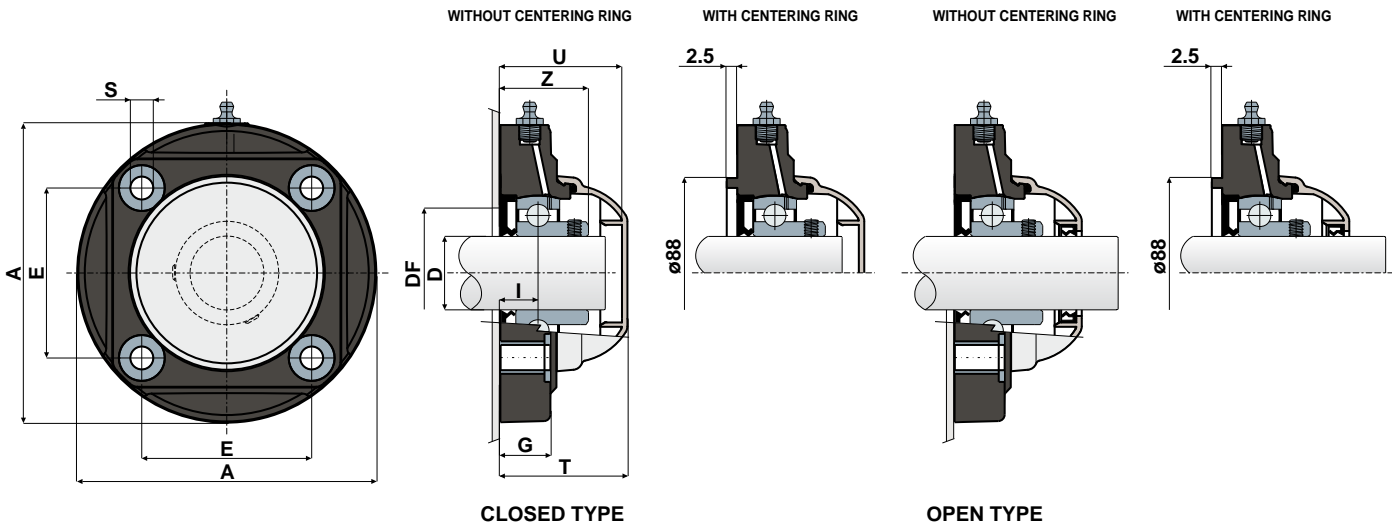

FLANGE WITHOUT CENTERING RING

		CHROME STEEL BEARING														Bearing load (N)		Bearing support load
D	SERIE	Support CODES				DIMENSIONS (mm)								DF		C	C0	(N)
		Black colour		White colour		E	A	S	G	I	Z	U	T	Max	Min			
		Closed type	Open type	Closed type	Open type													
35	UCFC 207 C	85647	85649	85655	85657	77,8	137	10,5	26	17	40,8	56	58	70	55	25500	15300	19550

STAINLESS STEEL BEARING AISI 440																		
D	SERIE	Support CODES				DIMENSIONS (mm)								Bearing load (N)		Bearing support load		
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0	(N)
		Closed type	Open type	Closed type	Open type									Max	Min			
35	UCFC 207 C	85651	85653	85659	85661	77,8	137	10,5	26	17	40,8	56	58	70	55	25500	15300	19550

FLANGE WITH CENTERING RING

		CHROME STEEL BEARING														Bearing load (N)		Bearing support load
D	SERIE	Support CODES				DIMENSIONS (mm)								DF		C	C0	(N)
		Black colour		White colour		E	A	S	G	I	Z	U	T	Max	Min			
		Closed type	Open type	Closed type	Open type													
35	UCFC 207 C	86029	86025	86031	86027	77,8	137	10,5	26	17	40,8	56	58	-	-	25500	15300	19550

		STAINLESS STEEL BEARING AISI 440														Bearing load (N)		Bearing support load
D	SERIE	Support CODES				DIMENSIONS (mm)								DF		C	C0	(N)
		Black colour		White colour		E	A	S	G	I	Z	U	T	Max	Min			
		Closed type	Open type	Closed type	Open type													
35	UCFC 207 C	86030	86026	86032	86028	77,8	137	10,5	26	17	40,8	56	58	-	-	25500	15300	19550

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.