

# A201



## ALUMINIUM CAM LEVER WITH THREADED STUD AND STEEL THRUST WASHER

### Materials:

(1) Aluminium alloy lever body (EN-AC-46200).

### Surface finish:

Fine sandblasted satin finish.

### Colour:

Epoxy powder coated, black (RAL 9011).

### Inserts:

(2) Turned stainless steel (Aisi 303) rotating pin, with threaded through hole for fastening the pin (thread tolerance 6H).

(4) Thrust washer, black reinforced PA66 (RAL 9011).

Stainless steel threaded stud (Aisi303) (thread tolerance 6g).

### (3) A201:



Galvanised steel washer with strength class 5.8.

### (3) A201CIN:

Stainless steel washer (Aisi 303).

### Special requests:

- The levers are available, upon request, in red; order code ending with the number 16, (Example: A200096.AM0816).

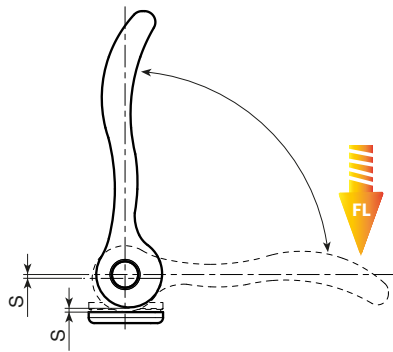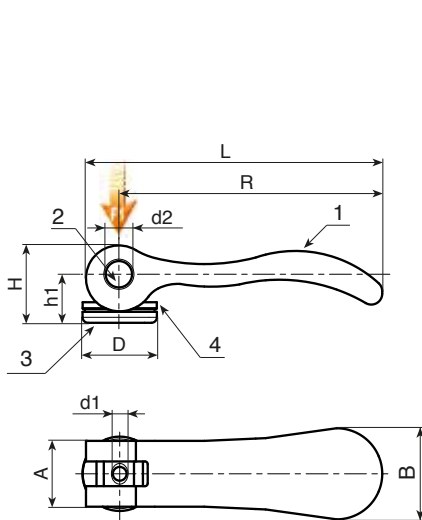

### Version with galvanised steel inserts

Art.	L	R	H	D	A	B	h1	S	d2	d1 <sub>6g</sub>	Q	g	F1 (kN)	FL (N)
A201036.AM03X..01	42	36	13	12	11,5	14,5	9	1	6	M3	10-15-30	8-9-11	1,5	90
A201036.AM04X..01	42	36	13	12	11,5	14,5	9	1	6	M4	10-15-30	9-10-12	1,5	90
A201052.AM04X..01	59	52	17	15,5	13	18	11	1	8	M4	15-20-30	18-19-20	2,5	100
A201052.AM05X..01	59	52	17	15,5	13	18	11	1	8	M5	20-30-40-50	22-23-24-26	2,5	100
A201070.AM05X..01	79	70,5	22	18	15	21,5	14,5	1,2	9	M5	20-30-40-50	38-40-42-44	4	120
A201070.AM06X..01	79	70,5	22	18	15	21,5	14,5	1,2	9	M6	20-30-40-50	40-42-44-46	4	120
A201096.AM08X..01	108	96	28,5	27	33	24	18	1,5	11	M8	25-30-40-50	114-116-119-121	8	350
A201096.AM10X..01	108	96	28,5	27	33	24	18	1,5	11	M10	25-30-40-50	121-123-127-132	8	350

Enter the selected stud length in place of the two dots . . in the item code.

### Version with Aisi 303 stainless steel inserts

Art.	L	R	H	D	A	B	h1	S	d2	d1 <sub>6g</sub>	Q	g	F1 (kN)	FL (N)
A201036.AM03X..01CIN	42	36	13	12	11,5	14,5	9	1	6	M3	10-15-30	8-9-11	1,5	90
A201036.AM04X..01CIN	42	36	13	12	11,5	14,5	9	1	6	M4	10-15-30	9-10-12	1,5	90
A201052.AM04X..01CIN	59	52	17	15,5	13	18	11	1	8	M4	15-20-30	18-19-20	2,5	100
A201052.AM05X..01CIN	59	52	17	15,5	13	18	11	1	8	M5	20-30-40-50	22-23-24-26	2,5	100
A201070.AM05X..01CIN	79	70,5	22	18	15	21,5	14,5	1,2	9	M5	20-30-40-50	38-40-42-44	4	120
A201070.AM06X..01CIN	79	70,5	22	18	15	21,5	14,5	1,2	9	M6	20-30-40-50	40-42-44-46	4	120
A201096.AM08X..01CIN	108	96	28,5	27	33	24	18	1,5	11	M8	25-30-40-50	114-116-119-121	8	350
A201096.AM10X..01CIN	108	96	28,5	27	33	24	18	1,5	11	M10	25-30-40-50	121-123-127-132	8	350

Enter the selected stud length in place of the two dots . . in the item code.

