

O434

FLAT HINGE WITH THREADED STUD AND THROUGH HOLE



Materials:

Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.
Galvanised steel threaded stud (thread tolerance 6g).

Hole:

Version TS:


Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.

Version TC:

Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.

Special Requests:

- Upon request and for special quantities inserts can be supplied in different materials.
- Upon request and for special quantities available in the colours indicated in the chart [page 805].

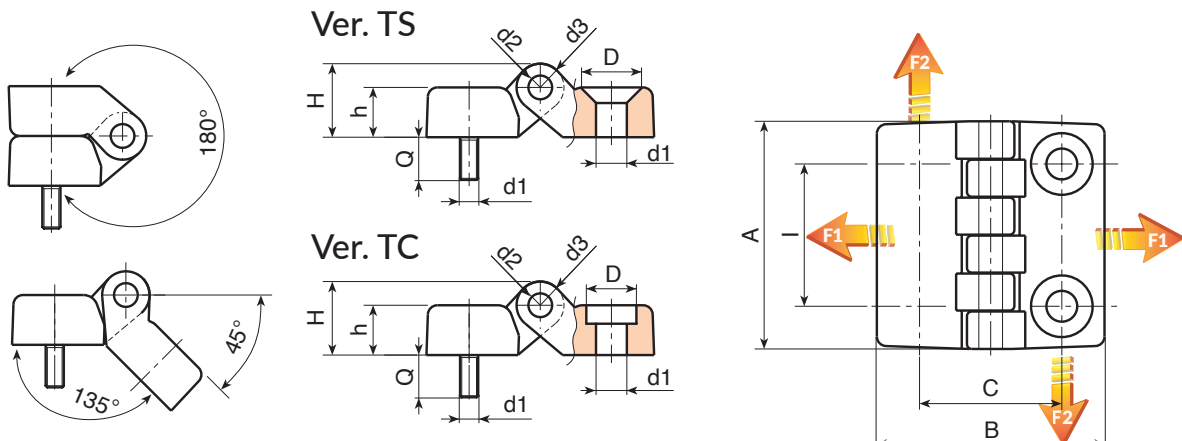

Version O434-TS: with holes for countersunk head screws

	art.	la	lb	A	B	h	H	d2	d3	d1	Q	g	F1 (N)	F2 (N)
●	O43430.TM0601TS	30	30	48	48	10.5	15.5	5	10	M6 / 6,5	15	31	2000	1450
●	O43440.TM0601TS	40	40	64	64	13	19	5	12	M6 / 6,5	20	60	3500	1650

Version O434-TC: with holes for cylindrical head screws

	art.	la	lb	A	B	h	H	d2	d3	d1	Q	g	F1 (N)	F2 (N)
●	O43430.TM0601TC	30	30	48	48	10.5	15.5	5	10	M6 / 6,5	15	31	2000	1450
●	O43440.TM0601TC	40	40	64	64	13	19	5	12	M6 / 6,5	20	60	3500	1650



Stock availability as % (🛒)
90% (●) - 40% (●) - 5% (●)