

# R250

NEW



## WHEEL WITH POLYAMIDE BODY AND INJECTED POLYURETHANE TREAD WITH BALL BEARINGS WITHOUT RIG (HEAVY DUTY SERIES)

**Materials:**  
**Wheel body:**  
Polyamide. Resistant to oils and greases.  
**Tread:**  
Injected polyurethane. Hardness  $60 \pm 5$  Shore D.


**Surface finish:**  
Smooth.

**Colour:**  
**Body:**  
Natural white.  
**Tread:**  
Red (Ral 3013).

**Wheel rotation:**  
(1) A pair of steel ball bearings is inserted in the wheel hub to provide excellent rollability under a heavy load.

**Special requests:**

- Upon request and for a minimum of 20 pieces, the wheel can be supplied with a needle roller cage, (replace code no. R250 with code no. R240).

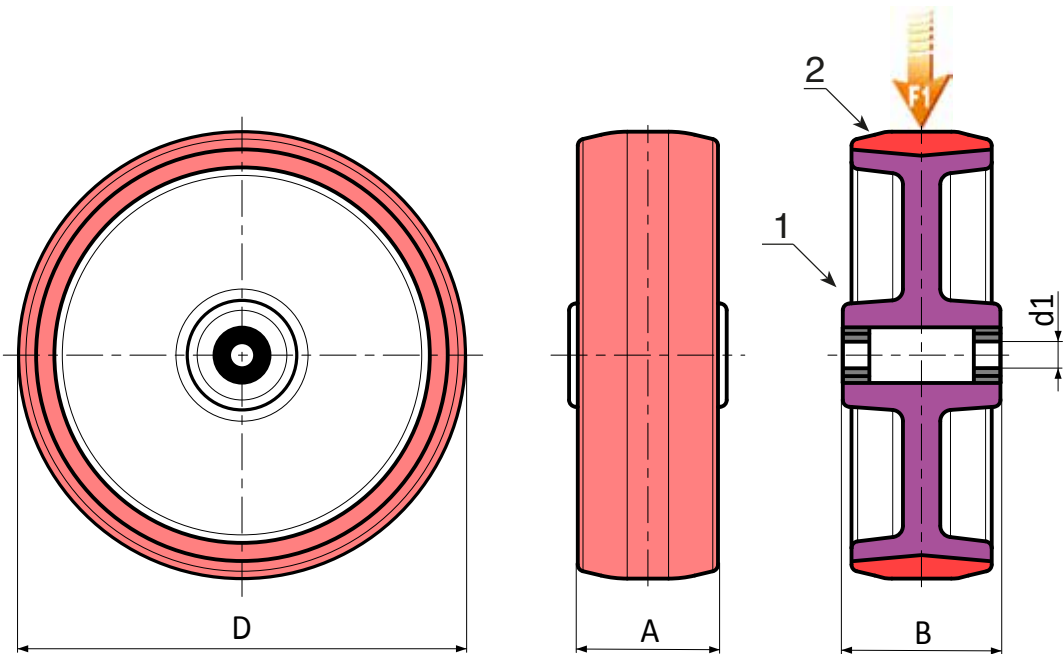

	art.	D	A	B	d1	g	F1 (Kg)
●	R250080.T34D12	80	34	40	12	-	260
●	R250100.T40D15	100	40	44	15	-	300
●	R250125.T40D15	125	40	45	15	-	400
●	R250150.T45D20	150	45	58	20	-	600
●	R250200.T50D20	200	50	58	20	-	750