



4-124.03 Concealed Hinge Pr03 120°



Benefits:

- ▶ For surface mounted doors.
- ▶ Hinge concealed.
- ▶ Door bending 23 mm.
- ▶ RH / LH application.
- ▶ Opening angle 120°.
- ▶ Door-part weld-on.
- ▶ Captive pin due to securing clip.

Material:

- ▶ **Frame-part, pin and fastening washer:** steel, zinc plated
- ▶ **Door-part:** steel, untreated
- ▶ **Securing clip:** POM, blue


1. = Installation instruction for washer



Concealed Hinge

	Part Number	Frame-part	Cutouts in the frame	Pin version
a)	243-9117.00-00000	with countersunk holes for M6 + fastening washer	8 or Ø10	self-securing
b)	243-9119.00-00000	with countersunk holes for M6	Ø6.3	self-securing
c)	243-9118.00-00000	with studs for M6 + fastening washer	8 or Ø10	self-securing
d)	243-9120.00-00000	with studs for M6	Ø6.3	self-securing

a), b)

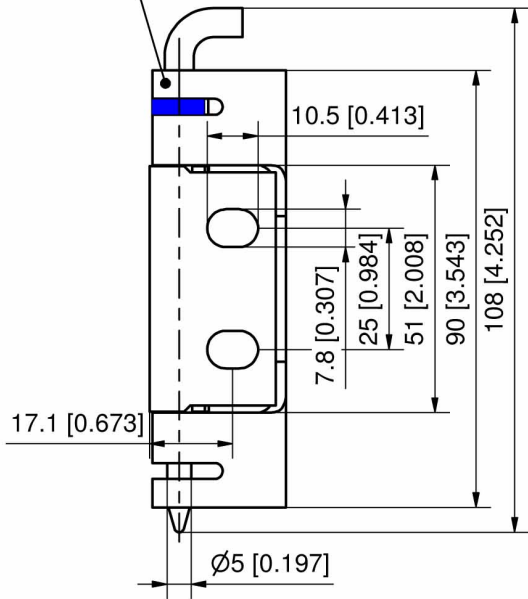

c), d)

