


Articulated feet, sanitizable

(base in stainless steel)

Ø 150 Part. 125

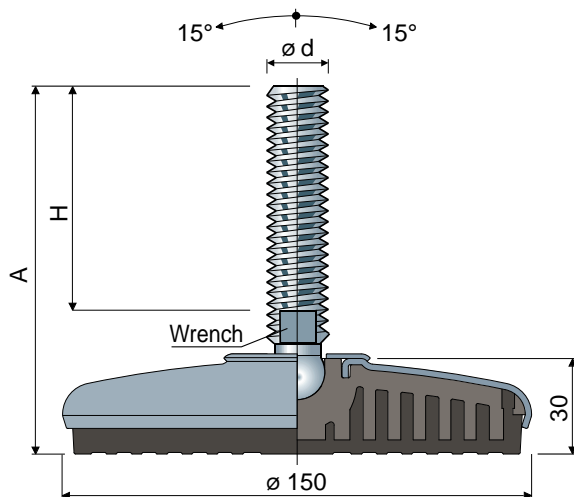

Spindle measures in mm				Spindle and base in stainless steel AISI 304 Code	Max static load (N)
ø d	A	H	Wrench		
M20	137	86	17	125 / 86006	25000
	167	116	17	125 / 86007	
	192	141	17	125 / 86008	
	257	206	17	125 / 86009	
M24	147	96	19	125 / 86011	27000
	173	122	19	125 / 86012	
	203	152	19	125 / 86013	
	233	182	19	125 / 86014	
	351	300	19	125 / 86015	
M30	195	144	24	125 / 86020	

Spindle measures in mm				Spindle and base in stainless steel AISI 304 Code	Max static load (N)
ø d	A	H	Wrench		
M24x2	189	138	19	125 / 86016	29000
	204	153	19	125 / 86017	
	262	211	19	125 / 86018	
	307	256	19	125 / 86019	

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black colour.

Box quantity: 8 pieces.

Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

Washers UNI 6592-69 - Box quantity: 24 pieces.

ø M	M20	M24	M30
Smm	3	4	4
ø A mm	37	44	56
Zinc plated steel codes	7290	7293	7295
Stainless steel codes	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.

ø d	M20	M24	M30
Smm	16	19	24
Ch. mm	30	36	46
Zinc plated steel codes	7276	7279	7281
Stainless steel codes	7278	7280	7282

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths • stainless steel AISI 316.
- Anti-slip pads: White colour.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.