




# Round flanged bearing supports

Serie **UCFC/CX**



Without protection cover

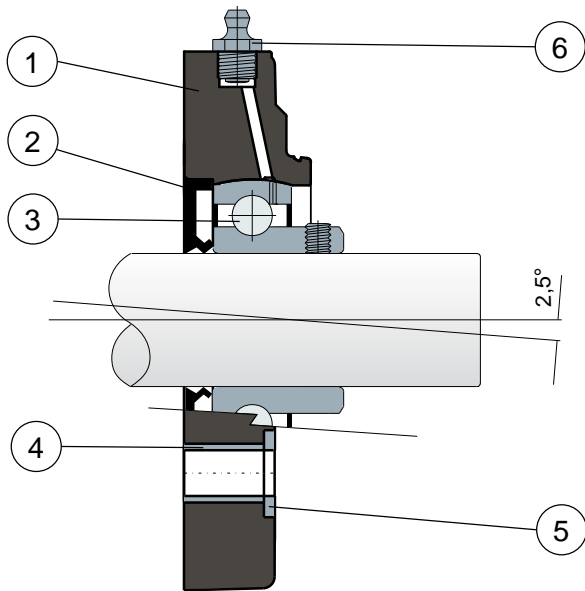

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFC/C series is lack of protection cover, which can be ordered separately as an accessory.


Support dimensions respect ISO 3228 set of rules.  
Maximum shaft alignment error 2,5°.  
For further information please contact our technical office or sales department.

# Round flanged bearing supports

Technical data



Serie **UCFC/CX**

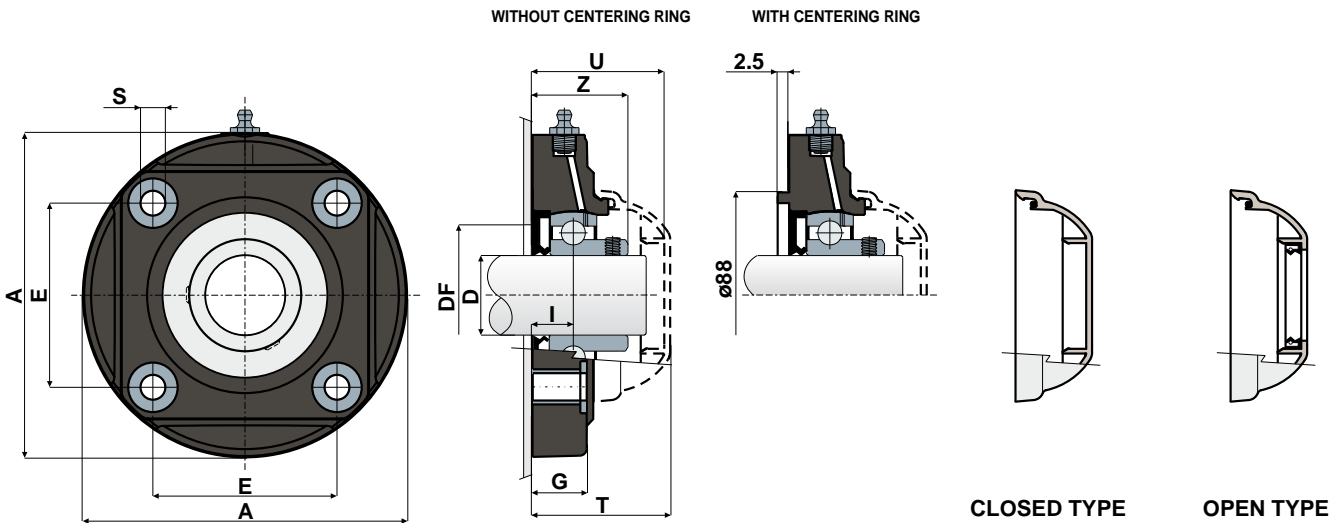

FLANGE WITHOUT CENTERING RING

		CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES	
D	SERIE	Black colour	White colour	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
35	UCFC 207 CX	85663	85666	77,8	137	10,5	26	17	40,8	56	58	70	55	25500	15300	19550	80077	80078

		CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES	
D	SERIE	Black colour	White colour	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
35	UCFC 207 CX	85665	85667	77,8	137	10,5	26	17	40,8	56	58	70	55	21600	15300	19550	80077	80078

FLANGE WITH CENTERING RING

		CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES	
D	SERIE	Black colour	White colour	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
35	UCFC 207 CX	86033	86035	77,8	137	10,5	26	17	40,8	56	58	-	-	25500	15300	19550	80077	80078

		CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES	
D	SERIE	Black colour	White colour	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
												Max	Min					
35	UCFC 207 CX	86034	86036	77,8	137	10,5	26	17	40,8	56	58	-	-	21600	15300	19550	80077	80078

**MATERIALS:** Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

**FEATURES:** The difference from UCFC/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

**BOX QUANTITY:** 8 pieces.

**ON REQUEST:** Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.